


■ DS01德式中间式9mm带宽（9mm non-perforated type with welded housing design）

加紧范围 Size	产品货号 ItemNo				只/袋	只/箱
mm	W1	W2	W4	W5	pcs/bag	pcs/carton
8-12	DS01A9812	DS01B9812	DS01D9812	DS01E9812	100	1000
10-16	DS01A91016	DS01B91016	DS01D91016	DS01E91016	100	1000
12-22	DS01A91222	DS01B91222	DS01D91222	DS01E91222	100	1000
16-27	DS01A91627	DS01B91627	DS01D91627	DS01E91627	100	1000
20-32	DS01A92032	DS01B92032	DS01D92032	DS01E92032	50	1000
25-40	DS01A92540	DS01B92540	DS01D92540	DS01E92540	50	500
30-45	DS01A93045	DS01B93045	DS01D93045	DS01E93045	50	500
35-50	DS01A93550	DS01B93550	DS01D93550	DS01E93550	50	500
40-60	DS01A94060	DS01B94060	DS01D94060	DS01E94060	50	500
50-70	DS01A95070	DS01B95070	DS01D95070	DS01E95070	50	500
60-80	DS01A96080	DS01B96080	DS01D96080	DS01E96080	10	500
70-90	DS01A97090	DS01B97090	DS01D97090	DS01E97090	10	500
80-100	DS01A980100	DS01B980100	DS01D980100	DS01E980100	10	250
90-110	DS01A990110	DS01B990110	DS01D990110	DS01E990110	10	250
100-120	DS01A9100120	DS01B9100120	DS01D9100120	DS01E9100120	10	250
110-130	DS01A9110130	DS01B9110130	DS01D9110130	DS01E9110130	10	250
120-140	DS01A9120140	DS01B9120140	DS01D9120140	DS01E9120140	10	250
130-150	DS01A9130150	DS01B9130150	DS01D9130150	DS01E9130150	10	250
140-160	DS01A9140160	DS01B9140160	DS01D9140160	DS01E9140160	10	200




材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	$\varphi x \leq \varphi 25$ 3.0Nm $\varphi x \geq \varphi 27$ 3.4Nm
W2	AISI 430ss/203ss	AISI 430ss/203ss	zinc plated steel	
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	$\varphi x \leq \varphi 25$ 4.0Nm $\varphi x \geq \varphi 27$ 4.9Nm
W5	AISI 316ss	AISI 316ss	AISI 316ss	

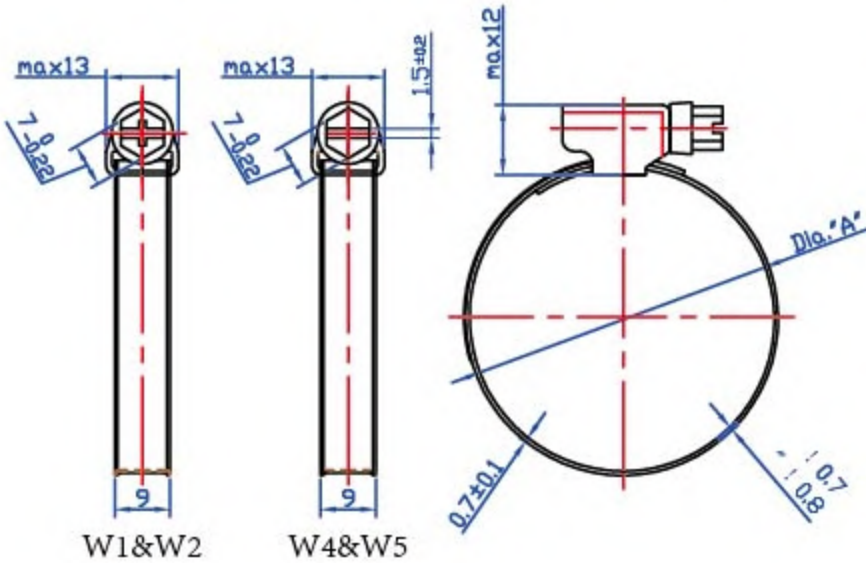

■ DS01德式中间式12mm带宽（12mm non-perforated type with welded housing design）

加紧范围 Size	产品货号 ItemNo				只/袋	只/箱
mm	W1	W2	W4	W5	pcs/bag	pcs/carton
12-20	DS01A121220	DS01B121220	DS01D121220	DS01E121220	50	1000
16-27	DS01A121627	DS01B121627	DS01D121627	DS01E121627	50	1000
20-32	DS01A122032	DS01B122032	DS01D122032	DS01E122032	50	1000
25-40	DS01A122540	DS01B122540	DS01D122540	DS01E122540	50	500
30-45	DS01A123045	DS01B123045	DS01D123045	DS01E123045	50	500
35-50	DS01A123550	DS01B123550	DS01D123550	DS01E123550	25	500
40-60	DS01A124060	DS01B124060	DS01D124060	DS01E124060	10	500
50-70	DS01A125070	DS01B125070	DS01D125070	DS01E125070	10	500
60-80	DS01A126080	DS01B126080	DS01D126080	DS01E126080	10	250
70-90	DS01A127090	DS01B127090	DS01D127090	DS01E127090	10	250
80-100	DS01A1280100	DS01B1280100	DS01D1280100	DS01E1280100	10	250
90-110	DS01A1290110	DS01B1290110	DS01D1290110	DS01E1290110	10	250
100-120	DS01A12100120	DS01B12100120	DS01D12100120	DS01E12100120	10	250
110-130	DS01A12110130	DS01B12110130	DS01D12110130	DS01E12110130	10	200
120-140	DS01A12120140	DS01B12120140	DS01D12120140	DS01E12120140	10	200
130-150	DS01A12130150	DS01B12130150	DS01D12130150	DS01E12130150	10	200
140-160	DS01A12140160	DS01B12140160	DS01D12140160	DS01E12140160	10	200
150-170	DS01A12150170	DS01B12150170	DS01D12150170	DS01E12150170	10	200
160-180	DS01A12160180	DS01B12160180	DS01D12160180	DS01E12160180	10	100
170-190	DS01A12170190	DS01B12170190	DS01D12170190	DS01E12170190	10	100

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	$\varphi x \leq \varphi 25$ 3.0Nm $\varphi x \geq \varphi 27$ 3.4Nm
W2	AISI 430ss/203ss	AISI 430ss/203ss	zinc plated steel	
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	$\varphi x \leq \varphi 25$ 4.0Nm $\varphi x \geq \varphi 27$ 4.9Nm
W5	AISI 316ss	AISI 316ss	AISI 316ss	

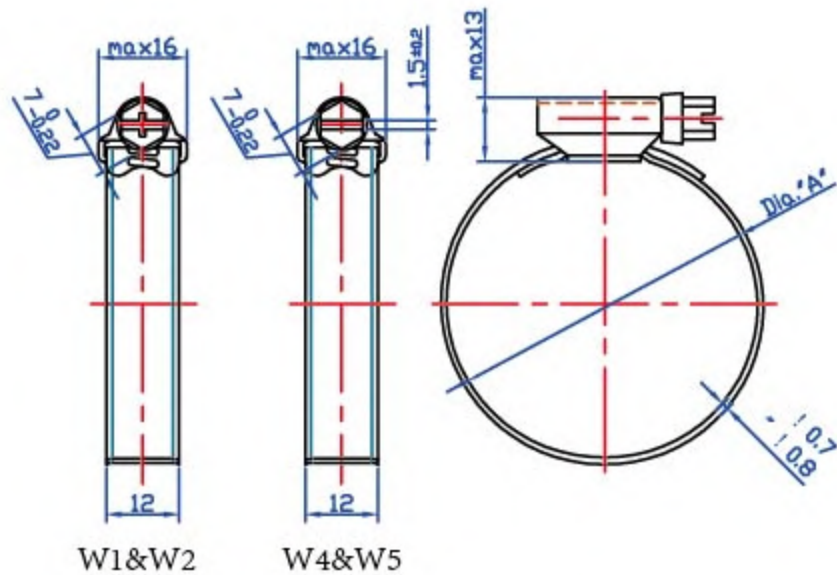

■ DS03德式偏头式9mm带宽（9mm non-perforated type without welded housing design）


加紧范围 Size	产品货号 ItemNo					只/袋	只/箱
mm	W1	W2	W3	W4	W5	pcs/bag	pcs/carton
8-12	DS03A9812	DS03B9812	DS03C9812	DS03D9812	DS03E9812	100	1000
10-16	DS03A91016	DS03B91016	DS03C91016	DS03D91016	DS03E91016	100	1000
12-22	DS03A91222	DS03B91222	DS03C91222	DS03D91222	DS03E91222	100	1000
16-27	DS03A91627	DS03B91627	DS03C91627	DS03D91627	DS03E91627	100	1000
20-32	DS03A92032	DS03B92032	DS03C92032	DS03D92032	DS03E92032	50	1000
25-40	DS03A92540	DS03B92540	DS03C92540	DS03D92540	DS03E92540	50	500
30-45	DS03A93045	DS03B93045	DS03C93045	DS03D93045	DS03E93045	50	500
35-50	DS03A93550	DS03B93550	DS03C93550	DS03D93550	DS03E93550	50	500
40-60	DS03A94060	DS03B94060	DS03C94060	DS03D94060	DS03E94060	50	500
50-70	DS03A95070	DS03B95070	DS03C95070	DS03D95070	DS03E95070	50	500
60-80	DS03A96080	DS03B96080	DS03C96080	DS03D96080	DS03E96080	10	500
70-90	DS03A97090	DS03B97090	DS03C97090	DS03D97090	DS03E97090	10	500
80-100	DS03A980100	DS03B980100	DS03C980100	DS03D980100	DS03E980100	10	250
90-110	DS03A990110	DS03B990110	DS03C990110	DS03D990110	DS03E990110	10	250
100-120	DS03A9100120	DS03B9100120	DS03C9100120	DS03D9100120	DS03E9100120	10	250
110-130	DS03A9110130	DS03B9110130	DS03C9110130	DS03D9110130	DS03E9110130	10	250
120-140	DS03A9120140	DS03B9120140	DS03C9120140	DS03D9120140	DS03E9120140	10	250
130-150	DS03A9130150	DS03B9130150	DS03C9130150	DS03D9130150	DS03E9130150	10	250
140-160	DS03A9140160	DS03B9140160	DS03C9140160	DS03D9140160	DS03E9140160	10	200

■ DS03德式偏头式12mm带宽（12mm non-perforated type without welded housing design）

加紧范围 Size	产品货号 ItemNo					只/袋	只/箱
mm	W1	W2	W3	W4	W5	pcs/bag	pcs/carton
16-27	DS03A121627	DS03B121627	DS03C121627	DS03D121627	DS03E121627	50	1000
20-32	DS03A122032	DS03B122032	DS03C122032	DS03D122032	DS03E122032	50	1000
25-40	DS03A122540	DS03B122540	DS03C122540	DS03D122540	DS03E122540	50	500
30-45	DS03A123045	DS03B123045	DS03C123045	DS03D123045	DS03E123045	50	500
35-50	DS03A123550	DS03B123550	DS03C123550	DS03D123550	DS03E123550	25	500
40-60	DS03A124060	DS03B124060	DS03C124060	DS03D124060	DS03E124060	10	500
50-70	DS03A125070	DS03B125070	DS03C125070	DS03D125070	DS03E125070	10	500
60-80	DS03A126080	DS03B126080	DS03C126080	DS03D126080	DS03E126080	10	250
70-90	DS03A127090	DS03B127090	DS03C127090	DS03D127090	DS03E127090	10	250
80-100	DS03A1280100	DS03B1280100	DS03C1280100	DS03D1280100	DS03E1280100	10	250
90-110	DS03A1290110	DS03B1290110	DS03C1290110	DS03D1290110	DS03E1290110	10	250
100-120	DS03A12100120	DS03B12100120	DS03C12100120	DS03D12100120	DS03E12100120	10	250
110-130	DS03A12110130	DS03B12110130	DS03C12110130	DS03D12110130	DS03E12110130	10	200
120-140	DS03A12120140	DS03B12120140	DS03C12120140	DS03D12120140	DS03E12120140	10	200
130-150	DS03A12130150	DS03B12130150	DS03C12130150	DS03D12130150	DS03E12130150	10	200
140-160	DS03A12140160	DS03B12140160	DS03C12140160	DS03D12140160	DS03E12140160	10	200
150-170	DS03A12150170	DS03B12150170	DS03C12150170	DS03D12150170	DS03E12150170	10	200
160-180	DS03A12160180	DS03B12160180	DS03C12160180	DS03D12160180	DS03E12160180	10	200
170-190	DS03A12170190	DS03B12170190	DS03C12170190	DS03D12170190	DS03E12170190	10	200
180-200	DS03A12180200	DS03B12180200	DS03C12180200	DS03D12180200	DS03E12180200	10	200
190-210	DS03A12190210	DS03B12190210	DS03C12190210	DS03D12190210	DS03E12190210	10	200

钢带非镂空式涡轮蜗杆喉箍

钢带非镂空式涡轮蜗杆喉箍

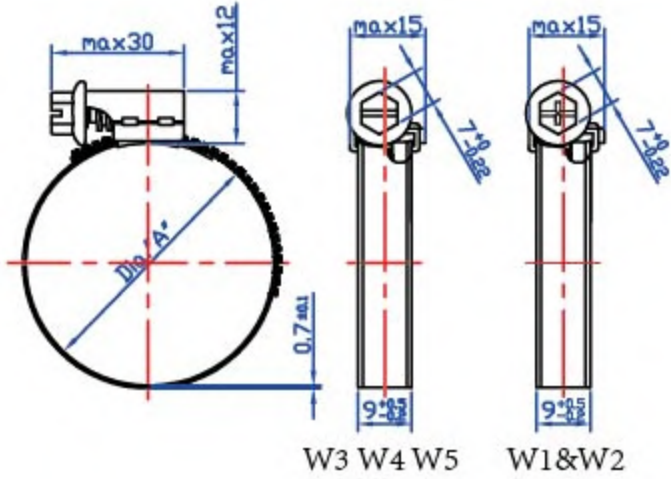


材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	$\phi x \leq \phi 12$ 3.0Nm $\phi 16 \leq \phi x \leq \phi 32$ 3.0Nm $\phi x > \phi 32$ 4.5Nm
W2	AISI 430ss	AISI 430ss	zinc plated steel	
W3	AISI 430ss	AISI 430ss	AISI 410ss	$\phi x \leq \phi 12$ 3.0Nm $\phi x \geq \phi 16$ 3.4Nm
W4	AISI 304ss	AISI 304ss	AISI 304ss	
W5	AISI 316ss	AISI 316ss	AISI 316ss	


■ DS03德式偏头式7.5mm带宽（7.5mm non-perforated type without welded housing design）

加紧范围 Size	产品货号 ItemNo			只/袋	只/箱
mm	W1	W2	W4	pcs/bag	pcs/carton
8-12	DS03A7.5812	DS03B7.5812	DS03D7.5812	100	1000
10-16	DS03A7.51016	DS03B7.51016	DS03D7.51016	100	1000
12-22	DS03A7.51222	DS03B7.51222	DS03D7.51222	100	1000

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	$\phi x \leq \phi 16$ 2.5Nm $\phi x = \phi 22$ 3Nm
W2	AISI 430ss	AISI 430ss	zinc plated steel	
W4	AISI 304ss	AISI 304ss	AISI 304ss	

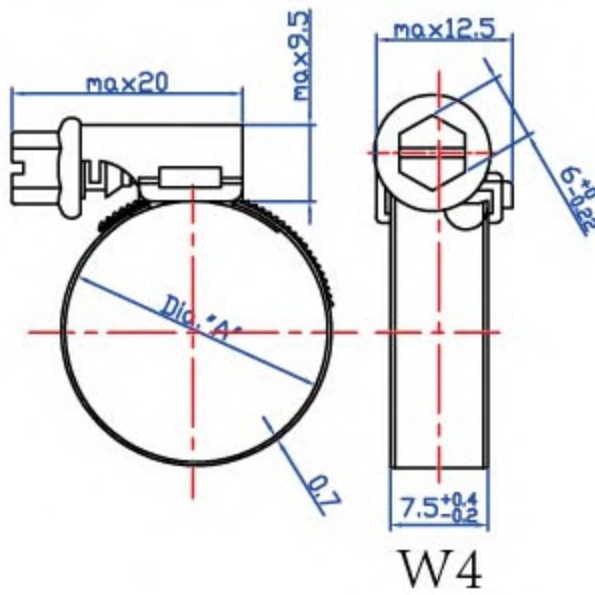

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	7.0Nm
W2	AISI 430ss	AISI 430ss	zinc plated steel	
W3	AISI 430ss	AISI 430ss	AISI 410ss	$\phi x \leq \phi 32$ 6.0Nm $\phi x > \phi 32$ 6.4Nm
W4	AISI 304ss	AISI 304ss	AISI 304ss	
W5	AISI 316ss	AISI 316ss	AISI 316ss	

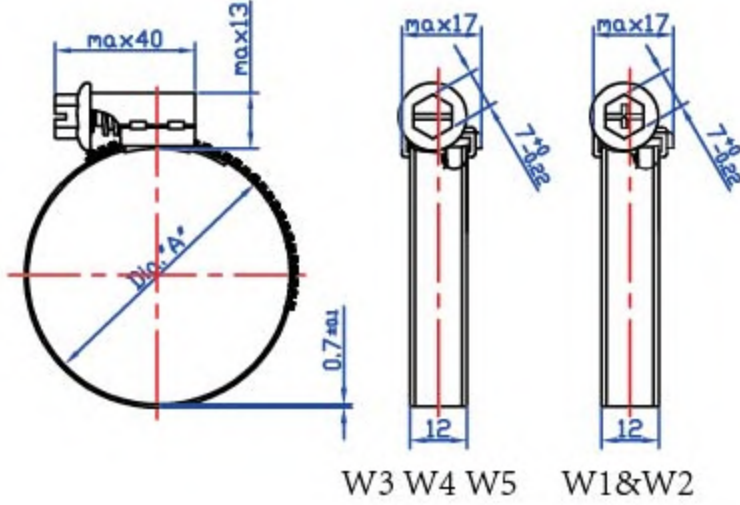

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

天津市洪彩喉箍制造有限公司


天津市洪彩喉箍制造有限公司

■ DS06 德式中间式9mm带宽（9mm non-perforated type with interlock housing design）

■ DS06 德式中间式 12mm带宽（12mm non-perforated type with interlock housing design ）DS06


加紧范围 Size	产品货号 ItemNo				只/袋	只/箱
mm	W1	W2	W4	W5	pcs/bag	pcs/carton
8-12	DS06A9812	DS06B9812	DS06D9812	DS06E9812	100	1000
10-16	DS06A91016	DS06B91016	DS06D91016	DS06E91016	100	1000
12-22	DS06A91222	DS06B91222	DS06D91222	DS06E91222	100	1000
16-27	DS06A91627	DS06B91627	DS06D91627	DS06E91627	100	1000
20-32	DS06A92032	DS06B92032	DS06D92032	DS06E92032	50	1000
25-40	DS06A92540	DS06B92540	DS06D92540	DS06E92540	50	500
30-45	DS06A93045	DS06B93045	DS06D93045	DS06E93045	50	500
35-50	DS06A93550	DS06B93550	DS06D93550	DS06E93550	50	500
40-60	DS06A94060	DS06B94060	DS06D94060	DS06E94060	50	500
50-70	DS06A95070	DS06B95070	DS06D95070	DS06E95070	50	500
60-80	DS06A96080	DS06B96080	DS06D96080	DS06E96080	10	500
70-90	DS06A97090	DS06B97090	DS06D97090	DS06E97090	10	500
80-100	DS06A980100	DS06B980100	DS06D980100	DS06E980100	10	250
90-110	DS06A990110	DS06B990110	DS06D990110	DS06E990110	10	250
100-120	DS06A9100120	DS06B9100120	DS06D9100120	DS06E9100120	10	250
110-130	DS06A9110130	DS06B9110130	DS06D9110130	DS06E9110130	10	250
120-140	DS06A9120140	DS06B9120140	DS06D9120140	DS06E9120140	10	250
130-150	DS06A9130150	DS06B9130150	DS06D9130150	DS06E9130150	10	250
140-160	DS06A9140160	DS06B9140160	DS06D9140160	DS06E9140160	10	200

加紧范围 Size	产品货号 ItemNo				只/袋	只/箱
mm	W1	W2	W4	W5	pcs/bag	pcs/carton
12-20	DS06A121220	DS06B121220	DS06D121220	DS06E121220	50	1000
16-27	DS06A121627	DS06B121627	DS06D121627	DS06E121627	50	1000
20-32	DS06A122032	DS06B122032	DS06D122032	DS06E122032	50	1000
25-40	DS06A122540	DS06B122540	DS06D122540	DS06E122540	50	500
30-45	DS06A123045	DS06B123045	DS06D123045	DS06E123045	50	500
35-50	DS06A123550	DS06B123550	DS06D123550	DS06E123550	25	500
40-60	DS06A124060	DS06B124060	DS06D124060	DS06E124060	10	500
50-70	DS06A125070	DS06B125070	DS06D125070	DS06E125070	10	500
60-80	DS06A126080	DS06B126080	DS06D126080	DS06E126080	10	250
70-90	DS06A127090	DS06B127090	DS06D127090	DS06E127090	10	250
80-100	DS06A1280100	DS06B1280100	DS06D1280100	DS06E1280100	10	250
90-110	DS06A1290110	DS06B1290110	DS06D1290110	DS06E1290110	10	250
100-120	DS06A12100120	DS06B12100120	DS06D12100120	DS06E12100120	10	250
110-130	DS06A12110130	DS06B12110130	DS06D12110130	DS06E12110130	10	200
120-140	DS06A12120140	DS06B12120140	DS06D12120140	DS06E12120140	10	200
130-150	DS06A12130150	DS06B12130150	DS06D12130150	DS06E12130150	10	200
140-160	DS06A12140160	DS06B12140160	DS06D12140160	DS06E12140160	10	200
150-170	DS06A12150170	DS06B12150170	DS06D12150170	DS06E12150170	10	200
160-180	DS06A12160180	DS06B12160180	DS06D12160180	DS06E12160180	10	100
170-190	DS06A12170190	DS06B12170190	DS06D12170190	DS06E12170190	10	100

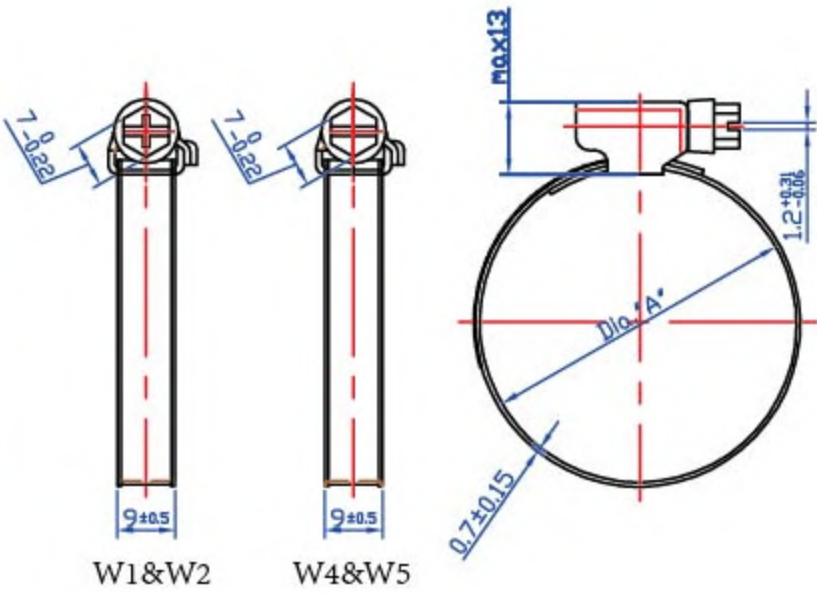

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	$\phi x \leq \phi 25$ 3.0Nm $\phi x \geq \phi 27$ 3.4Nm
W2	AISI 430ss/203ss	AISI 430ss/203ss	zinc plated steel	
W4	AISI 304ss	AISI 304ss	AISI 304ss	$\phi x \leq \phi 25$ 4.0Nm $\phi x \geq \phi 27$ 4.9Nm
W5	AISI 316ss	AISI 316ss	AISI 316ss	

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	$\phi x \leq \phi 25$ 3.4Nm $\phi x \geq \phi 27$ 3.8Nm
W2	AISI 430ss/203ss	AISI 430ss/203ss	zinc plated steel	
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	$\phi x \leq \phi 25$ 4.5Nm $\phi x \geq \phi 27$ 4.8Nm
W5	AISI 316ss	AISI 316ss	AISI 316ss	

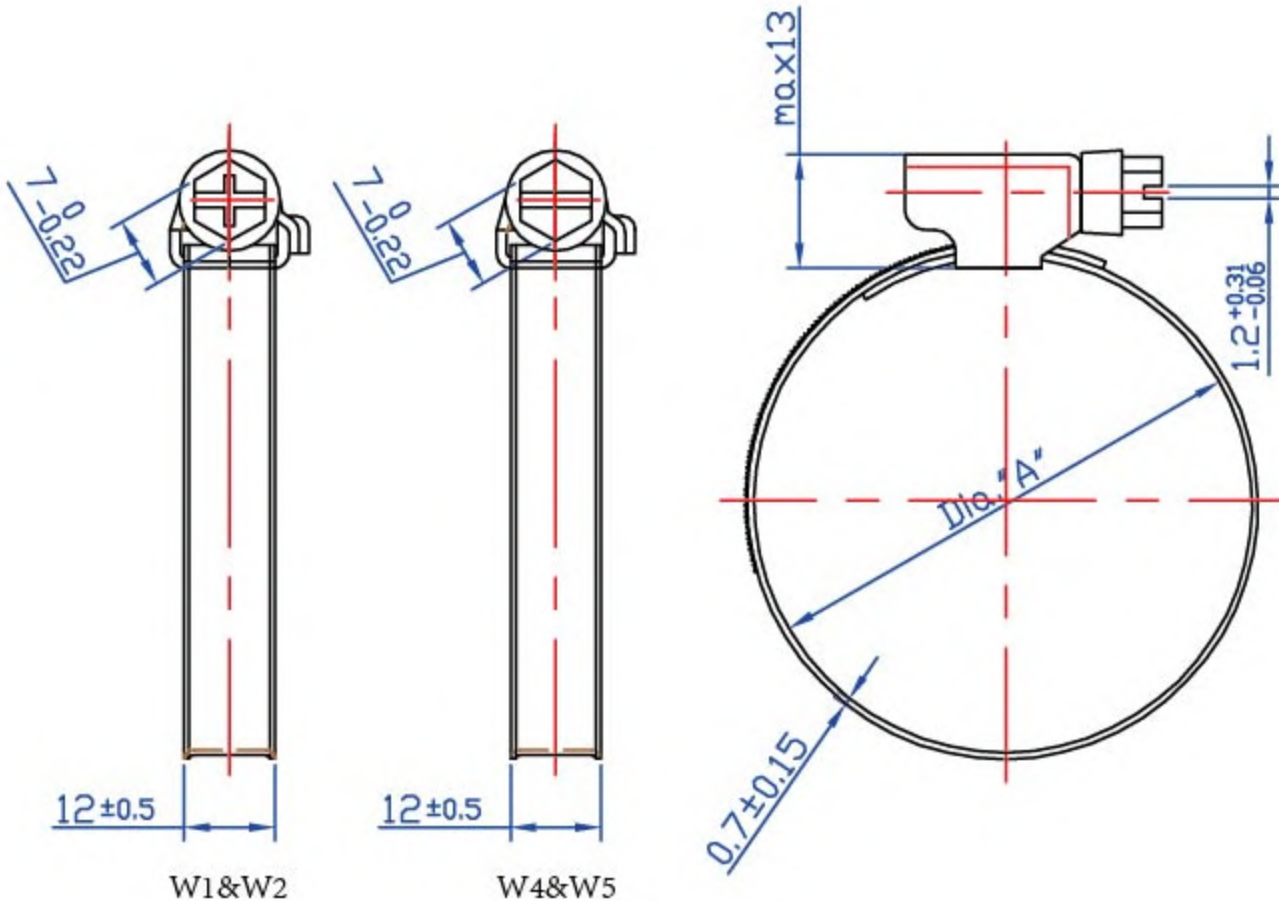

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

天津市洪彩喉箍制造有限公司

■ YS01英式挂头喉箍 （British type hose clamp with tube housing）

加紧范围 Size	带宽 bandwidth	产品货号 Item No			只/袋	只/箱	建议安装扭力 suggested installtorque
mm	mm	W1	W2	W4	pcs/bag	pcs/carton	
8-14	9.7	YS01A9814	YS01B9814	YS01D9814	100	2000	3.0Nm
11-17	9.7	YS01A91117	YS01B91117	YS01D91117	100	2000	3.0Nm
13-20	9.7	YS01A91320	YS01B91320	YS01D91320	100	2000	3.0Nm
15-24	9.7	YS01A91524	YS01B91524	YS01D91524	100	2000	3.0Nm
18-28	9.7	YS01A91828	YS01B91828	YS01D91828	100	2000	3.0Nm
22-32	9.7	YS01A92232	YS01B92232	YS01D92232	50	1000	3.0Nm
26-38	9.7	YS01A92638	YS01B92638	YS01D92638	50	500	3.0Nm
32-44	9.7	YS01A93244	YS01B93244	YS01D93244	50	500	3.0Nm
38-50	9.7	YS01A93850	YS01B93850	YS01D93850	50	500	3.0Nm
44-56	9.7	YS01A94456	YS01B94456	YS01D94456	25	500	3.0Nm
50-65	9.7	YS01A95065	YS01B95065	YS01D95065	25	250	3.0Nm
58-75	9.7	YS01A95875	YS01B95875	YS01D95875	25	250	3.0Nm
68-85	9.7	YS01A96885	YS01B96885	YS01D96885	10	250	3.0Nm
77-95	9.7	YS01A97795	YS01B97795	YS01D97795	10	250	3.0Nm
15-24	11.7	YS01A121524	YS01B121524	YS01D121524	50	500	4.8Nm
19-28	11.7	YS01A121928	YS01B121928	YS01D121928	50	500	4.8Nm
22-32	11.7	YS01A122232	YS01B122232	YS01D122232	50	500	4.8Nm
26-38	11.7	YS01A122638	YS01B122638	YS01D122638	50	500	4.8Nm
32-44	11.7	YS01A123244	YS01B123244	YS01D123244	50	500	5.2Nm
38-50	11.7	YS01A123850	YS01B123850	YS01D123850	50	500	5.2Nm
44-56	11.7	YS01A124456	YS01B124456	YS01D124456	25	500	5.2Nm
50-65	11.7	YS01A125065	YS01B125065	YS01D125065	25	500	5.2Nm
58-75	11.7	YS01A125875	YS01B125875	YS01D125875	25	200	5.2Nm
68-85	11.7	YS01A126885	YS01B126885	YS01D126885	25	200	5.2Nm
77-95	11.7	YS01A127795	YS01B127795	YS01D127795	10	200	5.2Nm
87-112	11.7	YS01A1287112	YS01B1287112	YS01D1287112	10	200	5.2Nm
104-138	11.7	YS01A12104138	YS01B12104138	YS01D12104138	10	100	5.2Nm
130-165	11.7	YS01A12130165	YS01B12130165	YS01D12130165	—	100	5.2Nm
150-180	11.7	YS01A12150180	YS01B12150180	YS01D12150180	—	100	5.2Nm
175-205	11.7	YS01A12175205	YS01B12175205	YS01D12175205	—	100	5.2Nm
200-231	11.7	YS01A12200231	YS01B12200231	YS01D12200231	—	50	5.2Nm
226-256	11.7	YS01A12226256	YS01B12226256	YS01D12226256	—	50	5.2Nm
251-282	11.7	YS01A12251282	YS01B12251282	YS01D12251282	—	50	5.2Nm
277-307	11.7	YS01A12277307	YS01B12277307	YS01D12277307	—	50	5.2Nm

材质 material	钢带 Band	箍头 Housing	螺丝 Screw
W1	zinc plated steel	zinc plated steel	zinc plated steel
W2	AISI 430ss	AISI 304ss	zinc plated steel
W4	AISI 304ss	AISI 304ss	AISI 304ss




根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

天津市洪彩喉箍制造有限公司

■ YS02英式点焊喉箍 （British type hose clamp with welded housing）

加紧范围 Size	带宽 bandwidth	产品货号 Item No		只/袋	只/箱	建议安装扭力 suggested installtorque
mm	NO	W1	W4	pcs/bag	pcs/carton	
10-16	000	YS02A1016	YS02D1016	100	2000	3.0Nm
13-19	00	YS02A1319	YS02D1319	100	2000	3.0Nm
16-25	0	YS02A1625	YS02D1625	100	2000	3.0Nm
19-29	0x	YS02A1929	YS02D1929	100	1000	3.0Nm
22-32	1A	YS02A2232	YS02D2232	50	500	4.8Nm
25-38	1	YS02A2538	YS02D2538	50	500	4.8Nm
32-44	1x	YS02A3244	YS02D3244	50	500	5.2Nm
35-51	2A	YS02A3551	YS02D3551	50	500	5.2Nm
38-57	2	YS02A3857	YS02D3857	25	500	5.2Nm
44-64	2x	YS02A4464	YS02D4464	25	500	5.2Nm
51-70	3	YS02A5170	YS02D5170	25	250	5.2Nm
64-76	3x	YS02A6476	YS02D6476	25	250	5.2Nm
70-89	4	YS02A7089	YS02D7089	10	200	5.2Nm
76-92	4x	YS02A7692	YS02D7692	10	200	5.2Nm
80-100	5	YS02A80100	YS02D80100	10	200	5.2Nm
90-110	5x	YS02A90110	YS02D90110	10	200	5.2Nm
100-120	6	YS02A100120	YS02D100120	10	200	5.2Nm
110-130	6X	YS02A110130	YS02D110130	10	200	5.2Nm
120-140	7	YS02A120140	YS02D120140	10	100	5.2Nm
130-150	7X	YS02A130150	YS02D130150	—	100	5.2Nm
140-160	8	YS02A140160	YS02D140160	—	50	5.2Nm
150-170	—	YS02A150170	YS02D150170	—	50	5.2Nm
160-180	—	YS02A160180	YS02D160180	—	50	5.2Nm
170-190	—	YS02A170190	YS02D170190	—	50	5.2Nm
180-200	—	YS02A180200	YS02D180200	—	50	5.2Nm
190-210	—	YS02A190210	YS02D190210	—	50	5.2Nm
200-220	—	YS02A200220	YS02D200220	—	50	5.2Nm
220-240	—	YS02A220240	YS02D220240	—	50	5.2Nm
230-250	—	YS02A230250	YS02D230250	—	50	5.2Nm
240-260	—	YS02A240260	YS02D240260	—	50	5.2Nm
280-300	—	YS02A280300	YS02D280300	—	50	5.2Nm
300-320	—	YS02A300320	YS02D300320	—	50	5.2Nm

材质 material	钢带 Band	箍头 Housing	螺丝 Screw
W1	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI 301/304ss	AISI 301/304ss	AISI 301/304ss

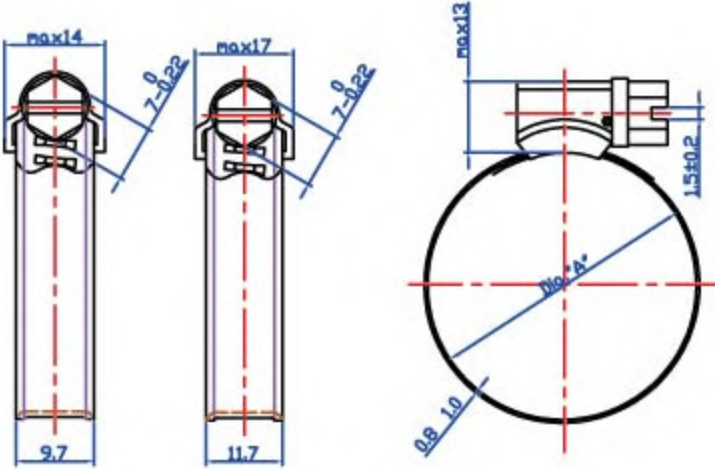

■ YS03 英式铆头喉箍 （British type hose clamp with riveted housing）

加紧范围 Size	带宽 bandwidth	产品货号 Item No		只/袋	只/箱	建议安装扭力 suggested installtorque
mm	NO	W2	W4	pcs/bag	pcs/carton	
9.5-12	000	YS03A912	YS03D912	100	2000	3Nm
11-16	M00	YS03A1116	YS03D1116	100	2000	3Nm
13-20	00	YS03A1320	YS03D1320	100	2000	3Nm
16-22	0	YS03A1622	YS03D1622	50	1000	4.8Nm
18-25	0X	YS03A1825	YS03D1825	50	1000	4.8Nm
22-30	1A	YS03A2230	YS03D2230	50	1000	4.8Nm
25-35	1	YS03A2535	YS03D2535	50	500	4.8Nm
27-40	1X	YS03A2740	YS03D2740	50	500	4.8Nm
35-50	2A	YS03A3550	YS03D3550	50	500	5.2Nm
40-55	2	YS03A4055	YS03D4055	25	500	5.2Nm
45-60	2X	YS03A4560	YS03D4560	25	500	5.2Nm
55-70	3	YS03A5570	YS03D5570	25	250	5.2Nm
60-80	3X	YS03A6080	YS03D6080	25	200	5.2Nm
70-90	4	YS03A7090	YS03D7090	10	200	5.2Nm
85-100	4X	YS03A85100	YS03D85100	10	200	5.2Nm
90-120	5	YS03A90120	YS03D90120	10	200	5.2Nm
120-140	—	YS03A120140	YS03D120140	10	200	5.2Nm
140-160	—	YS03A140160	YS03D140160	—	100	5.2Nm
160-180	—	YS03A160180	YS03D160180	—	100	5.2Nm

材质 material	钢带 Band	箍头 Housing	螺丝 Screw
W1	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI 301/304ss	AISI 301/304ss	AISI 301/304ss



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference can't be used as specification

天津市洪彩喉箍制造有限公司

YIS 意大利式喉箍 (Italy type band clamp)

加紧范围 Size	产品货号 Item No				只/袋	只/箱
	9.7mm 带宽 (bandwidth 9.7mm)		12.7mm 带宽 (bandwidth 12.7mm)			
mm	W2	W4	W2	W4	pcs/bag	pcs/carton
8-12	YIS01B10812	YIS01D10812	——	——	200	2000
10-16	YIS01B101016	YIS01D101016	——	——	200	2000
12-22	YIS01B101222	YIS01D101222	——	——	200	2000
16-27	YIS01B101627	YIS01D101627	YIS01B131627	YIS01D131627	200	1000
25-40	YIS01B102540	YIS01D102540	YIS01B132540	YIS01D132540	50	500
30-45	YIS01B103045	YIS01D103045	YIS01B133045	YIS01D133045	50	500
32-50	YIS01B103250	YIS01D103250	YIS01B133250	YIS01D133250	50	500
40-60	YIS01B104060	YIS01D104060	YIS01B134060	YIS01D134060	50	500
50-70	YIS01B105070	YIS01D105070	YIS01B135070	YIS01D135070	50	250
60-80	YIS01B106080	YIS01D106080	YIS01B136080	YIS01D136080	25	200
70-90	YIS01B107090	YIS01D107090	YIS01B137090	YIS01D137090	25	200
80-100	YIS01B1080100	YIS01D1080100	YIS01B1380100	YIS01D1380100	25	200
90-110	YIS01B1090110	YIS01D1090110	YIS01B1390110	YIS01D1390110	25	200
100-120	YIS01B10100120	YIS01D10100120	YIS01B13100120	YIS01D13100120	25	200
110-130	YIS01B10110130	YIS01D10110130	YIS01B13110130	YIS01D13110130	25	200
120-140	YIS01B10120140	YIS01D10120140	YIS01B13120140	YIS01D13120140	25	100
130-150	YIS01B10130150	YIS01D10130150	YIS01B13130150	YIS01D13130150	25	100
140-160	YIS01B10140160	YIS01D10140160	YIS01B13140160	YIS01D13140160	25	100
150-170	YIS01B10150170	YIS01D10150170	YIS01B13150170	YIS01D13150170	25	100
160-180	YIS01B10160180	YIS01D10160180	YIS01B13160180	YIS01D13160180	25	100
170-190	YIS01B10170190	YIS01D10170190	YIS01B13170190	YIS01D13170190	25	100
180-200	YIS01B10180200	YIS01D10180200	YIS01B13180200	YIS01D13180200	25	100

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W2	AISI 203ss/301ss	AISI 203ss/301ss	zinc plated steel	9.7mm bandwidth 4.9Nm 12.7mm bandwidth 5.2Nm
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

天津市洪彩喉箍制造有限公司

SFS01 9mm带宽速放式 (9mm Quick release clamp)

加紧范围 Size	带宽 mm	产品货号 Item No	
		W1	W2
25--100	9	SFS01A100	SFS01B100
25--125		SFS01A125	SFS01B125
25--150		SFS01A150	SFS01B150
25--175		SFS01A175	SFS01B175
25--200		SFS01A200	SFS01B200
25--225		SFS01A225	SFS01B225
25--250		SFS01A250	SFS01B250
25--275		SFS01A275	SFS01B275
25--300		SFS01A300	SFS01B300
25--350		SFS01A350	SFS01B350
25--400		SFS01A400	SFS01B400
25--450		SFS01A450	SFS01B450
25--500		SFS01A500	SFS01B500
25--550		SFS01A550	SFS01B550
25--600		SFS01A600	SFS01B600
25--650		SFS01A650	SFS01B650
25--700		SFS01A700	SFS01B700
25--750		SFS01A750	SFS01B750

材质 material	钢带 Band	箍头盖 Cover of housing	箍头底 Bottom of housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel	2.6Nm
W2	AISI 430ss	zinc plated steel	AISI 430ss	zinc plated steel	

SFS02 法式速放式 (9mm quick release clamp with French design)


加紧范围 Size	带宽 mm	产品货号 Item No	
		W1	W2
16-27	9	SFS02A1627	SFS02B1627
23-35		SFS02A2335	SFS02B2335
30-45		SFS02A3045	SFS02B3045
32-50		SFS02A3250	SFS02B3250
40-60		SFS02A4060	SFS02B4060
25--90		SFS02A90	SFS02B90
25--100		SFS02A100	SFS02B100
25--115		SFS02A115	SFS02B115
25--125		SFS02A125	SFS02B125
25--145		SFS02A145	SFS02B145
25--150		SFS02A150	SFS02B150
25--175		SFS02A175	SFS02B175
25--200		SFS02A200	SFS02B200
25--215		SFS02A215	SFS02B215
25--225		SFS02A225	SFS02B225
25--250		SFS02A250	SFS02B250
25--275		SFS02A275	SFS02B275
25--288		SFS02A288	SFS02B288
25--300		SFS02A300	SFS02B300
25--320		SFS02A320	SFS02B320
25--350		SFS02A350	SFS02B350
25--370		SFS02A370	SFS02B370
25--400		SFS02A400	SFS02B400
25--420		SFS02A420	SFS02B420
25--450		SFS02A450	SFS02B450
25--500		SFS02A500	SFS02B500
25--550		SFS02A550	SFS02B550
25--600		SFS02A600	SFS02B600
25--650		SFS02A650	SFS02B650
25--700		SFS02A700	SFS02B700
25--750		SFS02A750	SFS02B750



材质 material	钢带 Band	箍头盖 Cover of housing	箍头底 Bottom of housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel	2.6Nm
W2	AISI 430ss	zinc plated steel	AISI 430ss	zinc plated steel	

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

9mm速放式卡箍套装 SFS04
non-perforatde band endless hose clamp SFS04

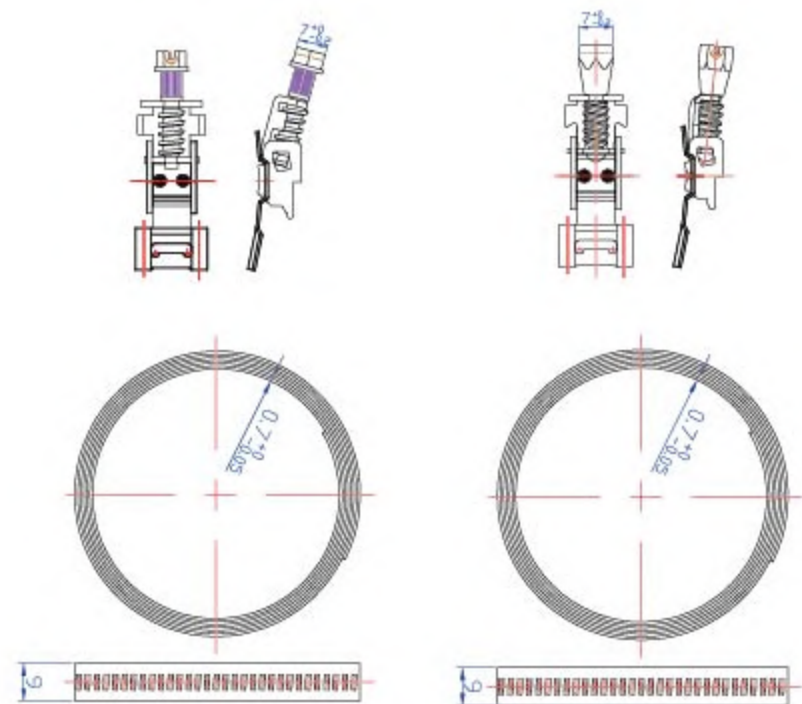

8mm带宽速德式中间式DS04
8mmbandwith germany type hose clamp DS04




德式手柄式喉箍DSHandle
Germany type hose clamp with handle DSHandle

加紧范围 Size
mm
8-12
10-16
12-20
12-22
16-27
20-32
25-40
30-45
35-50
40-60
50-70
60-80




XM04 5mm 带宽德式中间式
5mm bandwidth non-perforated band hose clamp

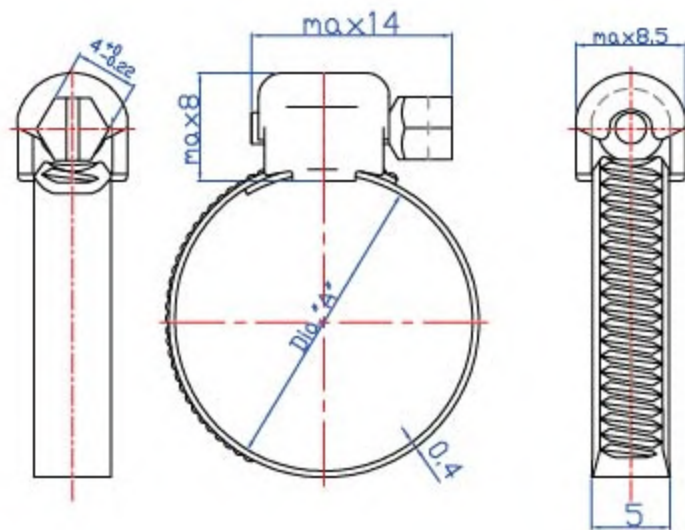

XM01 小美式喉箍（8mm micro perforated clamp）

型号	加紧范围 Size		产品货号 Item no				只/袋	只/箱
SAE no	mm	inch	W1	W2	W4	W5	pcs/bag	pcs/carton
4	6-16	0.25"-0.62"	XM01A4	XM01B4	XM01D4	XM01E4	100	2500
6	11-20	0.44"-0.78"	XM01A6	XM01B6	XM01D6	XM01E6	100	2500
8	13-23	0.5"-0.91"	XM01A8	XM01B8	XM01D8	XM01E8	100	1000
10	14-27	0.56"-1.06"	XM01A10	XM01B10	XM01D10	XM01E10	100	1000
12	18-32	0.69"-1.25"	XM01A12	XM01B12	XM01D12	XM01E12	50	1000

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	2.1Nm
W2	AISI 203ss/201ss/301ss	AISI 203ss/201ss/301ss	zinc plated steel	
W2B	AISI 203ss/201ss	zinc plated steel	zinc plated steel	
W4	AISI 201ss/301ss/304ss	AISI 201ss/301ss/304ss	AISI 201ss/301ss/304ss	
W5	AISI 316ss	AISI 316ss	AISI 316ss	


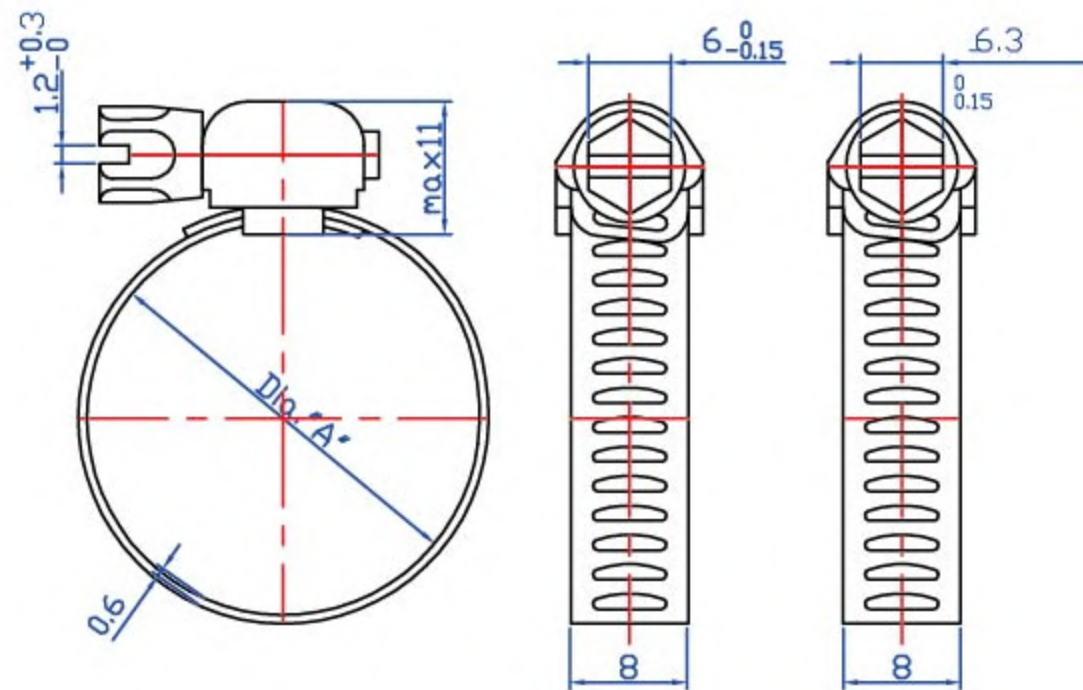


天津市洪彩喉箍制造有限公司

MS01 大美式喉箍 (12.7mm perforated and interlock design hose clamp)

加紧范围 Size			产品货号 Item no				只/袋	只/箱
型号	mm	inch	W1	W2	W4	W5	pcs/bag	pcs/carton
SAE no	mm	inch	W1	W2	W4	W5		
6	11-20	0.44"-0.78"	MS01A6	MS01B6	MS01D6	MS01E6	100	1000
8	13-23	0.5"-0.91"	MS01A8	MS01B8	MS01D8	MS01E8	100	1000
10	14-27	0.56"-1.06"	MS01A10	MS01B10	MS01D10	MS01E10	100	1000
12	18-32	0.69"-1.25"	MS01A12	MS01B12	MS01D12	MS01E12	50	1000
16	21-38	0.81"-1.5"	MS01A16	MS01B16	MS01D16	MS01E16	50	1000
20	21-44	0.81"-1.75"	MS01A20	MS01B20	MS01D20	MS01E20	50	500
24	27-51	1.06"-2"	MS01A24	MS01B24	MS01D24	MS01E24	50	500
28	33-57	1.31"-2.25"	MS01A28	MS01B28	MS01D28	MS01E28	50	500
32	40-64	1.56"-2.5"	MS01A32	MS01B32	MS01D32	MS01E32	50	500
36	46-70	1.81"-2.75"	MS01A36	MS01B36	MS01D36	MS01E36	50	500
40	50-76	2"-3"	MS01A40	MS01B40	MS01D40	MS01E40	20	500
44	59-83	2.31"-3.25"	MS01A44	MS01B44	MS01D44	MS01E44	20	500
48	65-89	2.56"-3.5"	MS01A48	MS01B48	MS01D48	MS01E48	20	500
52	72-95	2.81"-3.75"	MS01A52	MS01B52	MS01D52	MS01E52	20	500
56	78-102	3.06"-4"	MS01A56	MS01B56	MS01D56	MS01E56	10	250
60	84-108	3.31"-4.25"	MS01A60	MS01B60	MS01D60	MS01E60	10	250
64	91-114	3.56"-4.5"	MS01A64	MS01B64	MS01D64	MS01E64	10	250
72	103-127	4.06"-5"	MS01A72	MS01B72	MS01D72	MS01E72	10	250
80	117-140	4.62"-5.5"	MS01A80	MS01B80	MS01D80	MS01E80	10	250
88	130-152	5.12"-6"	MS01A88	MS01B88	MS01D88	MS01E88	10	250
96	141-165	5.56"-6.5"	MS01A96	MS01B96	MS01D96	MS01E96	10	250
104	157-178	6.18"-7"	MS01A104	MS01B104	MS01D104	MS01E104	10	250


14.2mm带宽可以适用于SAE型号16# 到104#的规格；
The 14.2mm bandwidth can be used for the sizes from SAE 16# to 104#.

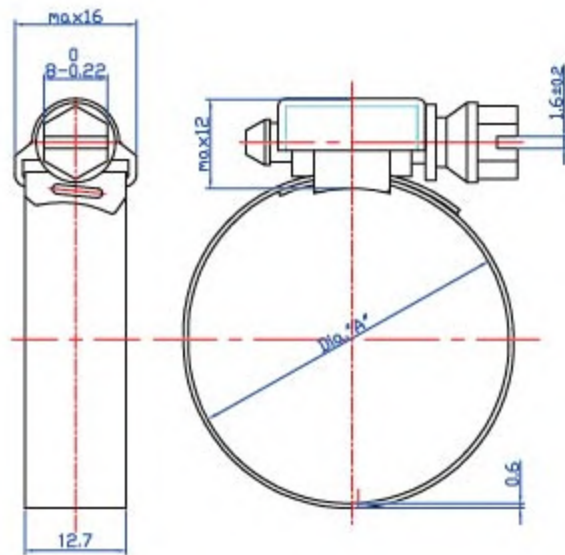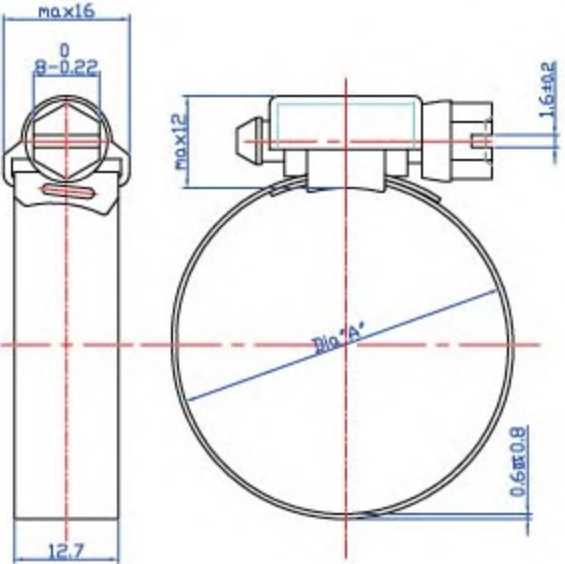

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	3.8Nm
W2	AISI 201ss/301ss	AISI 201ss/301ss	zinc plated steel	6Nm
W2B	AISI 201ss	zinc plated steel	zinc plated steel	
W4	AISI 201ss/301ss/304ss	AISI 201ss/301ss/304ss	AISI 201ss/301ss/304ss	
W5	AISI 316ss	AISI 316ss	AISI 316ss	


MS05 & MS06 美式扣盖喉箍 (2-pcs housing perforated hose clamp)

型号	加紧范围 Size		产品货号 Item no.			
			12.5mm 带宽 (bandwidth 12.5mm)	14.2mm 带宽 (bandwidth 14.2mm)	W1	W4
SAE no	mm	inch	W2	W4	W1	W4
6	11-20	0.44"-0.78"	MS05B6	MS05D6		
8	13-23	0.5"-0.91"	MS05B8	MS05D8		
10	14-27	0.56"-1.06"	MS05B10	MS05D10		MS06D10
12	18-32	0.69"-1.25"	MS05B12	MS05D12		MS06D12
16	21-38	0.81"-1.5"	MS05B16	MS05D16	MS06A16	MS06D16
20	21-44	0.81"-1.75"	MS05B20	MS05D20	MS06A20	MS06D20
24	27-51	1.06"-2"	MS05B24	MS05D24	MS06A24	MS06D24
28	33-57	1.31"-2.25"	MS05B28	MS05D28	MS06A28	MS06D28
32	40-64	1.56"-2.5"	MS05B32	MS05D32	MS06A32	MS06D32
36	46-70	1.81"-2.75"	MS05B36	MS05D36	MS06A36	MS06D36
40	52-76	2.06"-3"	MS05B40	MS05D40	MS06A40	MS06D40
44	59-83	2.31"-3.25"	MS05B44	MS05D44	MS06A44	MS06D44
48	65-89	2.56"-3.5"	MS05B48	MS05D48	MS06A48	MS06D48
52	71-95	2.81"-3.75"	MS05B52	MS05D52	MS06A52	MS06D52
56	78-102	3.06"-4"	MS05B56	MS05D56	MS06A56	MS06D56
60	84-108	3.31"-4.25"	MS05B60	MS05D60	MS06A60	MS06D60
64	90-114	3.56"-4.5"	MS05B64	MS05D64	MS06A64	MS06D64
72	103-127	4.06"-5"	MS05B72	MS05D72	MS06A72	MS06D72
80	117-140	4.62"-5.5"	MS05B80	MS05D80	MS06A80	MS06D80
88	130-152	5.12"-6"	MS05B88	MS05D88	MS06A88	MS06D88
96	141-165	5.56"-6.5"	MS05B96	MS05D96	MS06A96	MS06D96
104	157-178	6.18"-7"	MS05B104	MS05D104	MS06A104	MS06D104

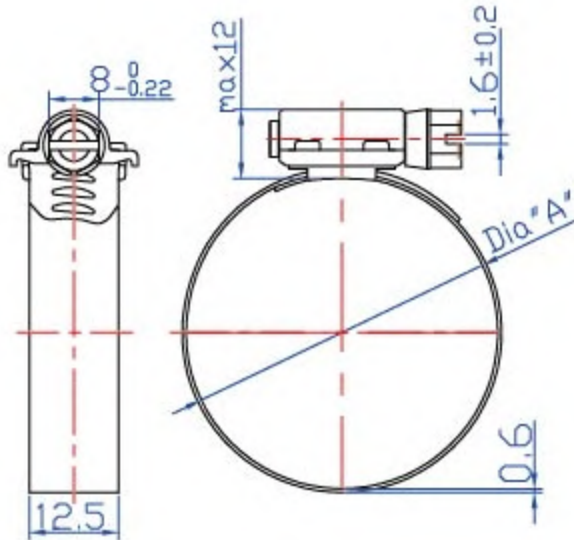


MS08 美式扣盖喉箍 (2-pcs housing perforated hose clamp---15.8mm bandwidth)

加紧范围 Size		产品货号 Item no.	
		15.8mm 带宽 (bandwidth 15.8mm)	
mm	inch	W4	W5
25-45	1"-1-3/4"	MS08D2545	MS08E2545
32-54	1-1/4"-2-1/8"	MS08D3254	MS08E3254
45-67	1-3/4"-2-5/8"	MS08D4567	MS08E4567
57-79	2-1/4"-3-1/8"	MS08D5779	MS08E5779
70-92	2-3/4"-3-5/8"	MS08D7092	MS08E7092
83-105	3-1/4"-4-1/8"	MS08D83105	MS08E83105
95-118	3-3/4"-4-5/8"	MS08D95118	MS08E95118
108-130	4-1/4"-5-1/8"	MS08D108130	MS08E108130
121-143	4-3/4"-5-5/8"	MS08D121143	MS08E121143
133-156	5-1/4"-6-1/8"	MS08D133156	MS08E133156
146-168	5-3/4"-6-5/8"	MS08D146168	MS08E146168
159-181	6-1/4"-7-1/8"	MS08D159181	MS08E159181
172-194	6-3/4"-7-5/8"	MS08D172194	MS08E172194
184-206	7-1/4"-8-1/8"	MS08D184206	MS08E184206
197-219	7-3/4"-8-5/8"	MS08D197219	MS08E197219
210-232	8-1/4"-9-1/8"	MS08D210232	MS08E210232

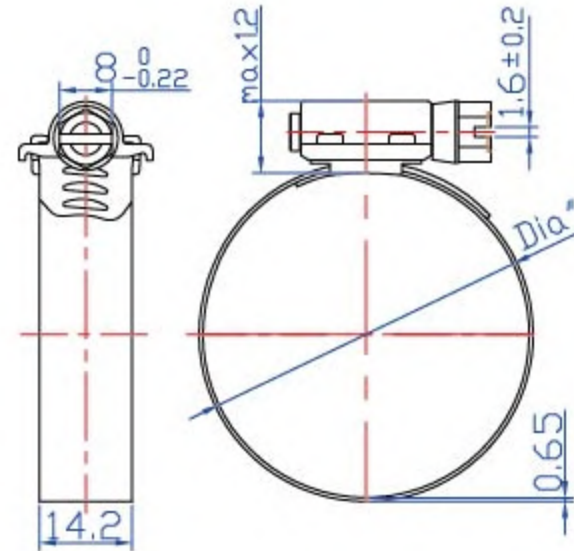

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	zinc plated steel	zinc plated steel	MS05 5.3Nm
W2	AISI 203ss/201ss/301ss	AISI 203ss/201ss/301ss	zinc plated steel	MS06 7.5Nm
W4	AISO304ss	AISO304ss	AISO304ss	MS08 11Nm

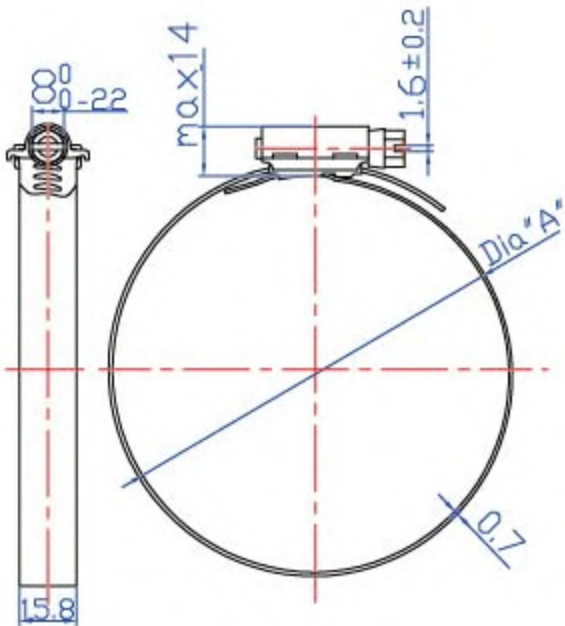

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification


根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference can't be used as specification

天津市洪彩喉箍制造有限公司

■ SFS03 12.7mm美式速放式喉箍 (12.7mm Quick release hose clamp)

加紧范围 Size			产品货号 Item no.		
型号	mm	inch	W1	W2	W4
SAE no					
12	13-32	1.25"	SFS03A1332	SFS03B1332	SFS03D1332
20	19-44	1.75"	SFS03A1944	SFS03B1944	SFS03D1944
24	26-51	2"	SFS03A2651	SFS03B2651	SFS03D2651
28	26-57	2.25"	SFS03A2657	SFS03B2657	SFS03D2657
36	26-70	2.75"	SFS03A2670	SFS03B2670	SFS03D2670
48	38-89	3.5"	SFS03A3889	SFS03B3889	SFS03D3889
56	25-101	4"	SFS03A25101	SFS03B25101	SFS03D25101
72	51-127	5"	SFS03A51127	SFS03B51127	SFS03D51127
88	51-152	6"	SFS03A51152	SFS03B51152	SFS03D51152
104	44-178	7"	SFS03A44178	SFS03B44178	SFS03D44178
116	44-197	7.8"	SFS03A44197	SFS03B44197	SFS03D44197
128	44-217	8.5"	SFS03A44217	SFS03B44217	SFS03D44217
136	44-228	9"	SFS03A44228	SFS03B44228	SFS03D44228
152	51-254	10"	SFS03A51254	SFS03B51254	SFS03D51254
188	52-312	12"	SFS03A52312	SFS03B52312	SFS03D52312
---	362-457	18"	SFS03A362457	SFS03B362457	SFS03D362457
---	355-508	20"	SFS03A355508	SFS03B355508	SFS03D355508
---	44-509	20"	SFS03A44509	SFS03B44509	SFS03D44509


材质 material	钢带 Band	箍头 Housing	固定片 washer	螺丝 Screw	建议安装扭力 suggested install torque
W1	zinc plated steel	AISI 203ss	AISI 410ss	zinc plated steel	3.4Nm
W2	AISI 201ss/301ss	AISI 304ss	AISI 410ss	zinc plated steel	4Nm
W4	AISI 301ss/304ss	AISI 304ss	AISI 410ss	AISI 301ss/304ss	

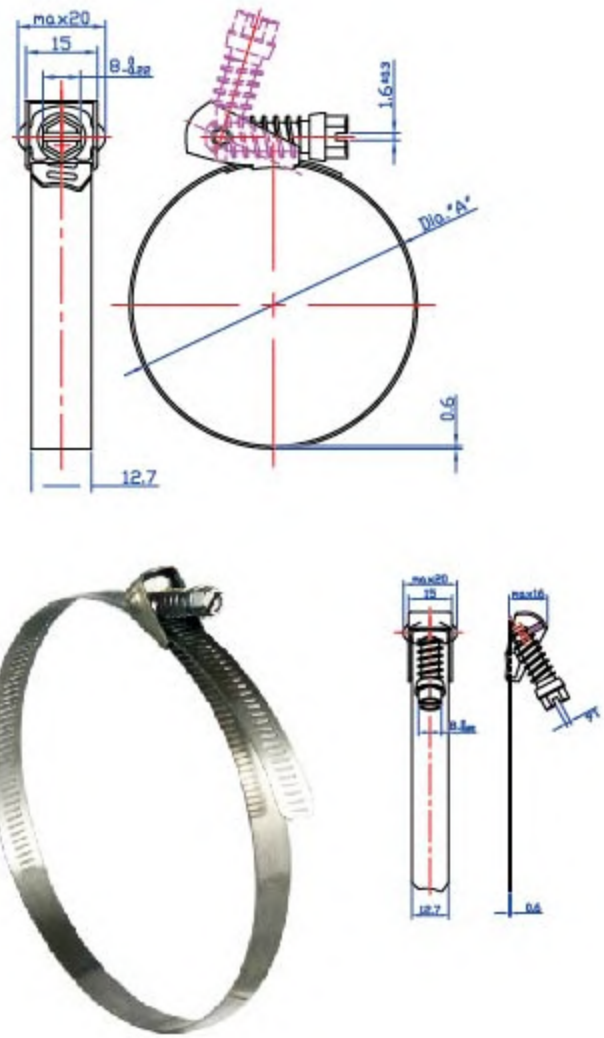

■ MS07 14.2mm重型美式带垫片带内衬喉箍 (14.2mm Constant Tension Clamp)

加紧范围 Size		产品货号 Item no.		建议安装扭力
mm		W2	W4	suggested install torque
16-27		MS07B1627	MS07D1627	7.5Nm
20-32		MS07B2032	MS07D2032	
25-40		MS07B2540	MS07D2540	
30-45		MS07B3045	MS07D3045	
35-50		MS07B3550	MS07D3550	


材质 material	钢带 Band	箍头 Housing	螺丝 Screw	垫圈 washers
W2	AISI 301ss/304ss	AISI 301ss/304ss	zinc plated steel	AISI 410ss
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	AISI 410ss

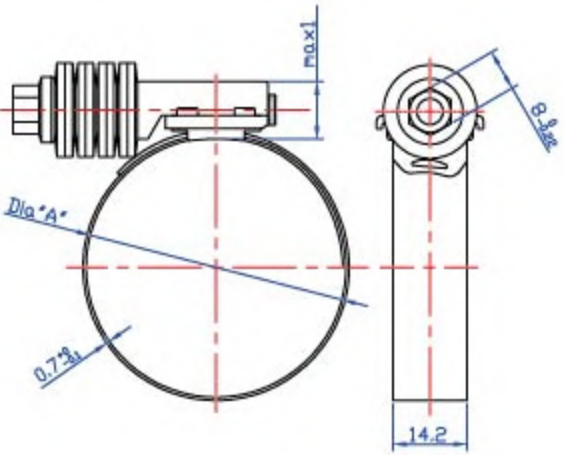

■ MS09 15.8mm重型美式带垫片带内衬喉箍 (15.8mm Constant Tension Clamp)

加紧范围 Size		产品货号 Item no.		建议安装扭力
mm	inch	W4	W5	suggested install torque
26-45	1"*1-3/4"	MS09B2645	MS09D2645	11nm
32-54	1-1/4"*2-1/8"	MS09B3254	MS09D3254	
45-67	1-3/4"*2-5/8"	MS09B4567	MS09D4567	
57-79	2-1/4"*3-1/8"	MS09B5779	MS09D5779	
70-92	2-3/4"*3-5/8"	MS09B7092	MS09D7092	
83-105	3-1/4"*4-1/8"	MS09B83105	MS09D83105	
96-118	3-3/4"*4-5/8"	MS09B95118	MS09D95118	
108-130	4-1/4"*5-1/8"	MS09B108130	MS09D108130	
121-143	4-3/4"*5-5/8"	MS09B121143	MS09D121143	
134-156	5-1/4"*6-1/8"	MS09B134156	MS09D134156	
146-168	5-3/4"*6-5/8"	MS09B146168	MS09D146168	
159-181	6-1/4"*7-1/8"	MS09B159181	MS09D159181	
172-194	6-3/4"*7-5/8"	MS09B172194	MS09D172194	
184-206	7-1/4"*8-1/8"	MS09B184206	MS09D184206	
197-219	7-3/4"*8-5/8"	MS09B197219	MS09D197219	
210-232	8-1/4"*9-1/8"	MS09B210232	MS09D210232	

材质 material	钢带 Band	箍头 Housing	螺丝 Screw	垫圈 washers
W2	AISI 301ss/304ss	AISI 301ss/304ss	zinc plated steel	AISI 410ss
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	AISI 410ss

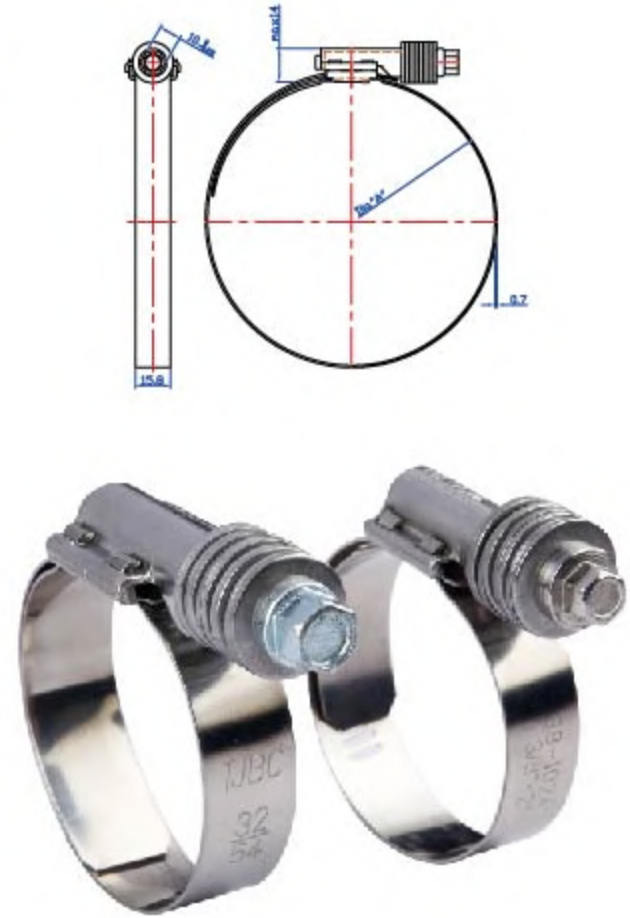

■ MS02&XM03 美式套装 (Perforated endless clamp)

型号	钢带宽度	钢带长度	钢带厚度	材质	箍头数量	自由扭力	负载扭力
SAE no	bandwidth mm	length of band mm	thickness of band mm	material	qty of housing	free torque Nm	break torque Nm
MS03	12.7	3000	0.6	201ss/301ss/304ss/316ss	6	0.6	2.5
XM02	8	3000	0.6	201ss/301ss/304ss/316ss	6	0.8	6.5



■ MSHandle 大美式手柄式喉箍 12.7mm perforated clamp with handle

型号	加紧范围 Size	
SAE no	mm	inch
6	11-20	0.44"-0.78"
8	13-23	0.5"-0.91"
10	14-27	0.56"-1.06"
12	18-32	0.69"-1.25"
16	21-38	0.81"-1.5"
20	21-44	0.81"-1.75"
24	27-51	1.06"-2"
28	33-57	1.31"-2.25"
32	40-64	1.56"-2.5"
36	46-70	1.81"-2.75"
40	52-76	2.06"-3"



■ XMHandle 小美式手柄式喉箍 Micro perforated clamp with handle The min size is 12mm, the max size is 82mm




根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference, can't be used as specification

■ QL01 T型强力卡箍（T-bolt clamp）


加紧范围 Size	产品货号 Item no.	
mm	W2	W4
37-40	QL01B3740	QL01D3740
43-49	QL01B4349	QL01D4349
46-52	QL01B4652	QL01D4652
51-57	QL01B5157	QL01D5157
58-65	QL01B5865	QL01D5865
64-72	QL01B6472	QL01D6472
70-78	QL01B7078	QL01D7078
76-84	QL01B7684	QL01D7684
83-91	QL01B8391	QL01D8391
89-97	QL01B8997	QL01D8997
95-103	QL01B95103	QL01D95103
102-110	QL01B102110	QL01D102110
108-116	QL01B108116	QL01D108116
114-122	QL01B114122	QL01D114122
121-129	QL01B121129	QL01D121129
127-135	QL01B127135	QL01D127135
133-141	QL01B133141	QL01D133141
140-148	QL01B140148	QL01D140148
146-154	QL01B146154	QL01D146154
152-160	QL01B152160	QL01D152160
159-167	QL01B159167	QL01D159167
165-173	QL01B165173	QL01D165173
171-179	QL01B171179	QL01D171179
178-186	QL01B178186	QL01D178186
184-192	QL01B184192	QL01D184192

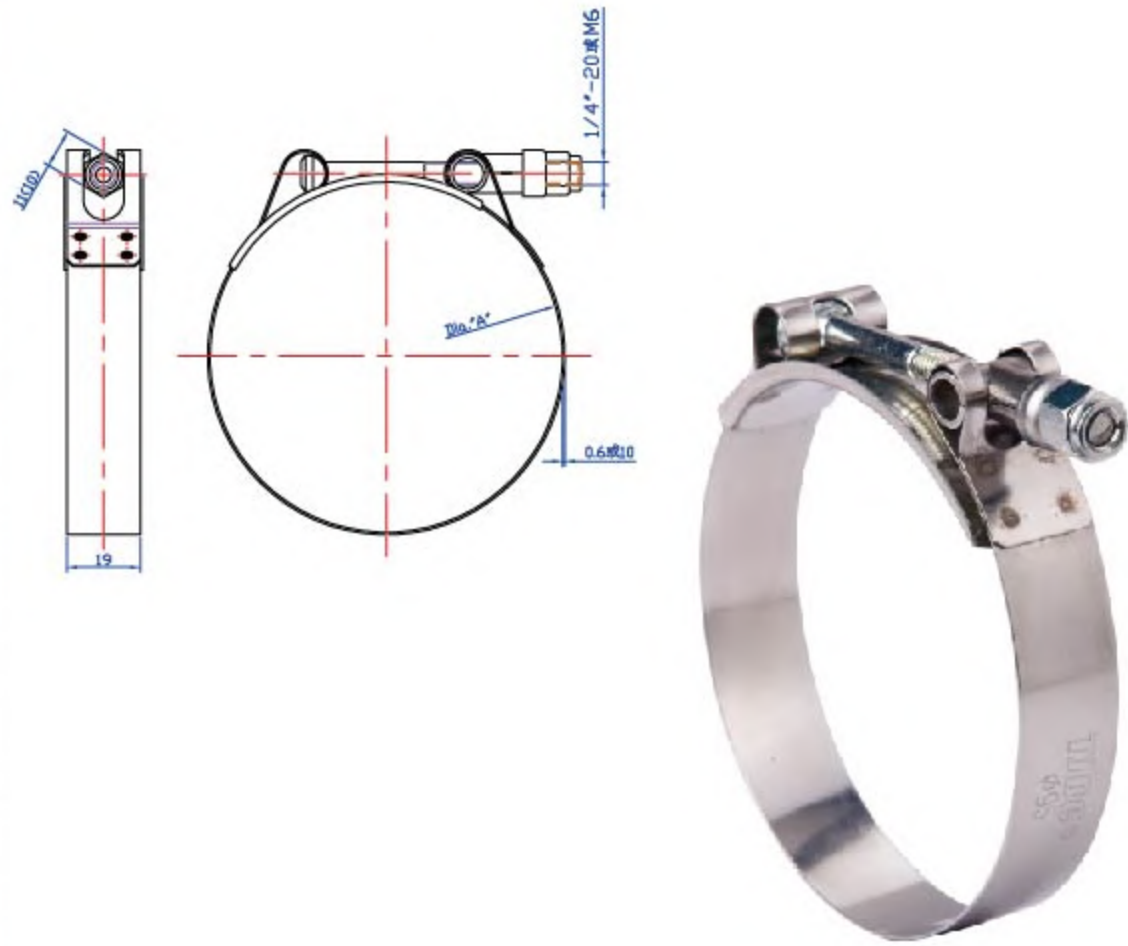

带宽 bandwidth	材质 material	钢带 Band	舌板 Bridge	三通管 Trunnion	三通冒 cap	螺栓 bolt	螺母 nut	安装扭力 install torque Nm
19mm	W2	AISI 301ss/304ss	AISI 301ss/304ss	AISI 304ss	AISI 304ss	zinc plated steel	zinc plated steel	9
19mm	W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 304ss	AISI 304ss	AISI 304ss	AISI 304ss	

■ QL02 T型弹簧卡箍（T-bolt with spring clamp）

加紧范围 Size	带宽 bandwidth	产品货号 Item no.
mm	mm	W2
63-70	19	QL02B6370
67-75		QL02B6775
70-78		QL02B7078
72-80		QL02B7280
73-81		QL02B7381
76-84		QL02B7684
77-85		QL02B7785
79-87		QL02B7987
83-90		QL02B8390
86-94		QL02B8694
87-95		QL02B8795
89-97		QL02B8997
92-100		QL02B92100
95-103		QL02B95103
99-106		QL02B99106
102-109		QL02B102109
103-110		QL02B103110
105-113		QL02B105113
107-115		QL02B107115
108-116		QL02B108116
111-119		QL02B111119
112-120		QL02B112120
114-122		QL02B114122
130-138		QL02B130138
132-140		QL02B132140
138-146		QL02B138146
140-148		QL02B140148
152-160		QL02B152160
155-164		QL02B155164
182-190		QL02B182190
187-195		QL02B187195

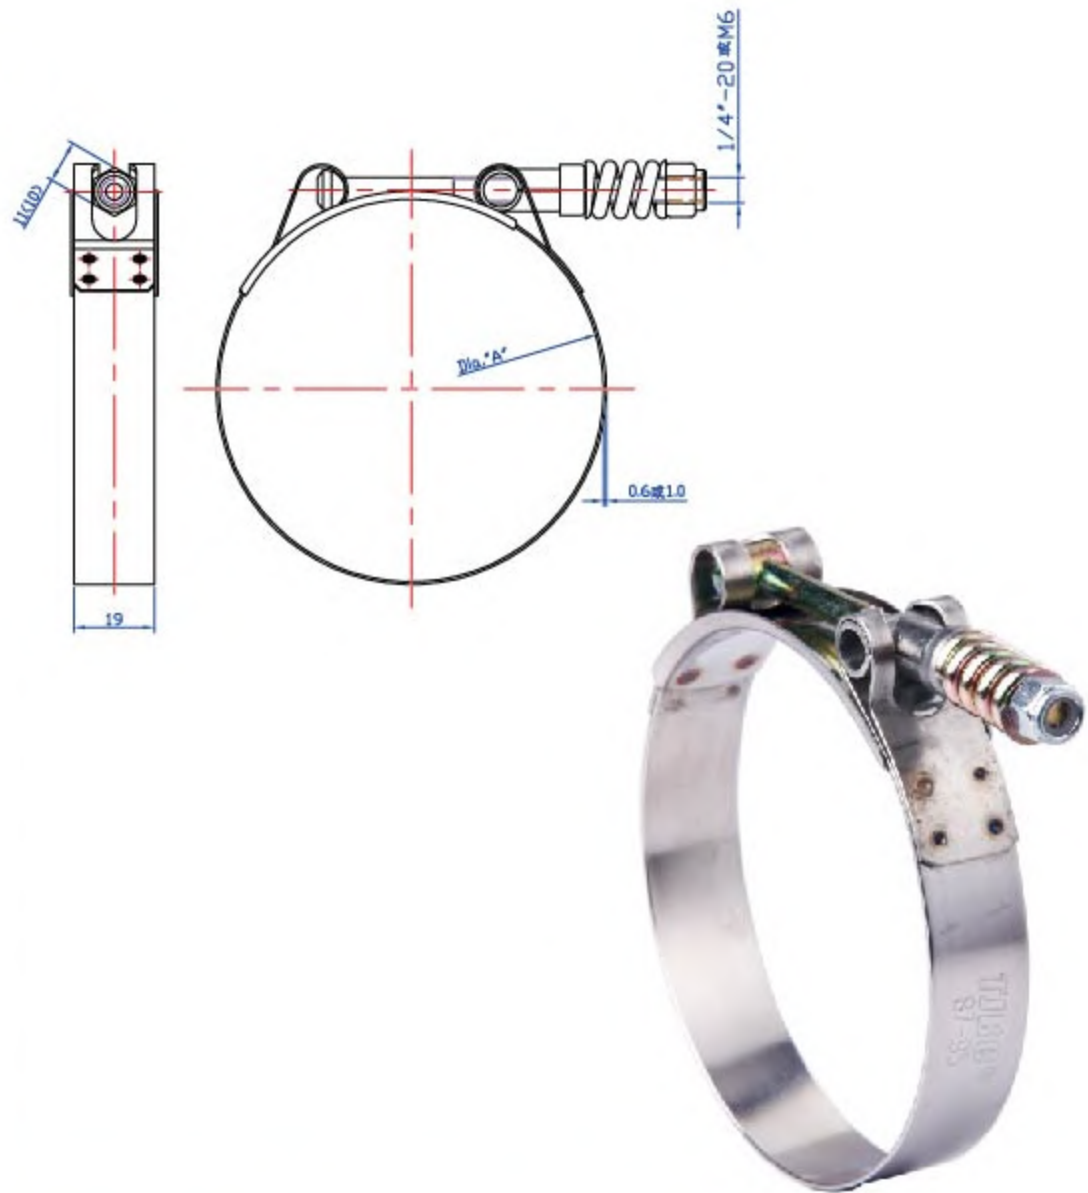

带宽 bandwidth	材质 material	钢带 Band	箍头 Housing	三通管 Trunnion	三通冒 cap	弹簧 spring	螺栓 bolt	螺母 nut	安装扭力 install torque Nm
19	W2	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	AISI 304ss	zinc plated steel	zinc plated steel	zinc plated steel	9

■ QL03 单头实心强力（Unitary clamp）

加紧范围 Size mm	螺丝 screw	W1		W2 & W4 & W5		建议安装扭力 suggested install torque	只/箱 pcs/carton
		产品货号 Item no.	钢带bandwidth mm	产品货号 Item no.	钢带bandwidth mm		
17-19	M5 × 40	QL03A1719	0.6 × 18	QL03B1719	QL03D1719	4.5Nm	200
20-22	M5 × 40	QL03A2022		QL03B2022	QL03D2022		200
23-25	M5 × 40	QL03A2325		QL03B2325	QL03D2325		200
26-28	M5 × 40	QL03A2628		QL03B2628	QL03D2628		200
29-31	M6 × 50	QL03A2931	0.8 × 20	QL03B2931	QL03D2931	9Nm	200
32-35	M6 × 50	QL03A3235		QL03B3235	QL03D3235		200
36-39	M6 × 50	QL03A3639		QL03B3639	QL03D3639		200
40-43	M6 × 50	QL03A4043		QL03B4043	QL03D4043		200
44-47	M6 × 55	QL03A4447	1.2 × 22	QL03B4447	QL03D4447	9Nm	100
48-51	M6 × 55	QL03A4851		QL03B4851	QL03D4851		100
52-55	M6 × 55	QL03A5255		QL03B5255	QL03D5255		100
56-59	M6 × 55	QL03A5659		QL03B5659	QL03D5659		100
60-63	M6 × 55	QL03A6063	1.5 × 22	QL03B6063	QL03D6063	18Nm	100
64-67	M8 × 70	QL03A6467		QL03B6467	QL03D6467		100
68-73	M8 × 70	QL03A6873		QL03B6873	QL03D6873		100
74-79	M8 × 70	QL03A7479		QL03B7479	QL03D7479		50
80-85	M8 × 70	QL03A8085	1.5 × 24	QL03B8085	QL03D8085	18Nm	50
86-91	M8 × 70	QL03A8691		QL03B8691	QL03D8691		50
92-97	M8 × 70	QL03A9297		QL03B9297	QL03D9297		50
98-103	M8 × 70	QL03A98103		QL03B98103	QL03D98103		50
104-112	M8 × 80	QL03A104112	1.7 × 26	QL03B104112	QL03D104112	29Nm	50
113-121	M8 × 80	QL03A113121		QL03B113121	QL03D113121		50
122-130	M8 × 80	QL03A122130		QL03B122130	QL03D122130		50
131-139	M10 × 90	QL03A131139		QL03B131139	QL03D131139		50
140-148	M10 × 90	QL03A140148	1.7 × 26	QL03B140148	QL03D140148	29Nm	50
149-161	M10 × 110	QL03A149161		QL03B149161	QL03D149161		50
162-174	M10 × 110	QL03A162174		QL03B162174	QL03D162174		25
175-187	M10 × 110	QL03A175187		QL03B175187	QL03D175187		25
188-200	M10 × 110	QL03A188200	1.7 × 26	QL03B188200	QL03D188200	29Nm	25
201-213	M10 × 110	QL03A201213		QL03B201213	QL03D201213		25
214-226	M10 × 110	QL03A214226		QL03B214226	QL03D214226		25
227-239	M10 × 110	QL03A227239		QL03B227239	QL03D227239		25
240-252	M10 × 110	QL03A240252	1.7 × 26	QL03B240252	QL03D240252	29Nm	25

材质 material	钢带 Band	舌板 bridge	轴 Trunnion	套管 sleeving	螺栓 bolt
W1	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel
W2	AISI 430ss	AISI 430ss	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	A2-70
W5	AISI 316ss	AISI 316ss	AISI 316ss	AISI 316ss	A4-70



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference can't be used as specification

■ QL03L 轻型单头实心强力（Light Unitary clamp）

加紧范围 Size mm	螺丝 screw	W1		建议安装扭力 suggested install torque	只/箱 pcs/carton
		产品货号 Item no.	钢带bandwidth mm		
44-47	M6×55	QL03LA4447	20×0.8	9Nm	100
48-51	M6×55	QL03LA4851			100
52-55	M6×55	QL03LA5255			100
56-59	M6×55	QL03LA5659			100
60-63	M6×55	QL03LA6063			100
64-67	M6×55	QL03LA6467			100
68-73	M8×70	QL03LA6873	22×1.2	18Nm	100
74-79	M8×70	QL03LA7479			50
80-85	M8×70	QL03LA8085			50
86-91	M8×70	QL03LA8691			50
92-97	M8×70	QL03LA9297			50
98-103	M8×70	QL03LA98103			50
104-112	M8×80	QL03LA104112	26×1.2	29Nm	50
113-121	M8×80	QL03LA113121			50
122-130	M8×80	QL03LA122130			50
131-139	M10×90	QL03LA131139			50
140-148	M10×90	QL03LA140148			50
149-161	M10×110	QL03LA149161			50
162-174	M10×110	QL03LA162174			25
175-187	M10×110	QL03LA175187			25
188-200	M10×110	QL03LA188200			25
201-213	M10×110	QL03LA201213			25
214-226	M10×110	QL03LA214226			25
227-239	M10×110	QL03LA227239			25
240-252	M10×110	QL03LA240252			25



材质 material	钢带 Band	舌板 bridge	轴 Trunnion	套管 Sleeving	螺栓 Bolt
W1	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel

■ QL04 单头双层实心强力卡箍（Unitary clamp with double bands）

加紧范围 Size mm	产品货号 Item No			带宽 bandwidth mm	螺丝 screw	料厚 thickness of band mm	建议安装扭力 suggested i nstall torque	只/箱 pcs/carton
	W1	W4	W5					
35-40	QL04A3540	QL04D3540	QL04E3540	20	M6*45	1.0	9Nm	50
40-45	QL04A4045	QL04D4045	QL04E4045			1.0		50
45-50	QL04A4550	QL04D4550	QL04E4550			1.0		50
50-55	QL04A5055	QL04D5055	QL04E5055			1.0		50
55-60	QL04A5560	QL04D5560	QL04E5560			1.0		50
60-65	QL04A6065	QL04D6065	QL04E6065			1.0		50
65-70	QL04A6570	QL04D6570	QL04E6570			1.0		50
70-75	QL04A7075	QL04D7075	QL04E7075			1.0		50
75-80	QL04A7580	QL04D7580	QL04E7580			1.0		50
80-85	QL04A8085	QL04D8085	QL04E8085			1.0		50
85-90	QL04A8590	QL04D8590	QL04E8590			1.0		50
90-95	QL04A9095	QL04D9095	QL04E9095			1.0		50
95-100	QL04A95100	QL04D95100	QL04E95100			1.0		50
100-105	QL04A100105	QL04D100105	QL04E100105			1.0		50
105-110	QL04A105110	QL04D105110	QL04E105110			1.0		50
110-115	QL04A110115	QL04D110115	QL04E110115			1.0		50
115-120	QL04A115120	QL04D115120	QL04E115120			1.0		50
120-125	QL04A120125	QL04D120125	QL04E120125			1.0		50
125-130	QL04A125130	QL04D125130	QL04E125130			1.0		50
130-135	QL04A130135	QL04D130135	QL04E130135			1.0		50
135-140	QL04A135140	QL04D135140	QL04E135140			1.0		50
140-145	QL04A140145	QL04D140145	QL04E140145			1.0		50
145-150	QL04A145150	QL04D145150	QL04E145150			1.0		50
150-155	QL04A150155	QL04D150155	QL04E150155			1.0		50
155-160	QL04A155160	QL04D155160	QL04E155160			1.0		50

材质 material	钢带 Band	舌板 bridge	轴 Trunnion	螺栓 bolt
W1	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	A2-70
W5	AISI 316ss	AISI 316ss	AISI 316ss	A4-70



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

■ QL29 单头空心强力（Unitary clamp with hollow shaft）

加紧范围 Size mm	螺丝 screw	W1 产品货号Item no.	"钢带bandwidth mm"	建议安装扭力 suggested install torque	只/箱 pcs/carton
17-19	M5×40	QL29A1719	0.6×18	4.5Nm	200
20-22	M5×40	QL29A2022			200
23-25	M5×40	QL29A2325			200
26-28	M5×40	QL29A2628			200
29-31	M6×50	QL29A2931	0.8×20	9Nm	200
32-35	M6×50	QL29A3235			200
36-39	M6×50	QL29A3639			200
40-43	M6×50	QL29A4043			200
44-47	M6×55	QL29A4447	1.2×22		100
48-51	M6×55	QL29A4851			100
52-55	M6×55	QL29A5255			100
56-59	M6×55	QL29A5659			100
60-63	M6×55	QL29A6063	1.5×22		100
64-67	M8×70	QL29A6467			100
68-73	M8×70	QL29A6873			50
74-79	M8×70	QL29A7479			50
80-85	M8×70	QL29A8085	1.5×24	18Nm	50
86-91	M8×70	QL29A8691			50
92-97	M8×70	QL29A9297			50
98-103	M8×70	QL29A98103			50
104-112	M8×80	QL29A104112	1.7×26	29Nm	50
113-121	M8×80	QL29A113121			50
122-130	M8×80	QL29A122130			50
131-139	M10×90	QL29A131139			50
140-148	M10×90	QL29A140148			50
149-161	M10×110	QL29A149161			25
162-174	M10×110	QL29A162174			25
175-187	M10×110	QL29A175187			25
188-200	M10×110	QL29A188200			25
201-213	M10×110	QL29A201213			25
214-226	M10×110	QL29A214226			25
227-239	M10×110	QL29A227239			25
240-252	M10×110	QL29A240252			25

材质 material	钢带 Band	舌板 bridge	轴 Trunnion
W1	zinc plated steel	zinc plated steel	zinc plated steel



根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference can't be used as specification

■ QL06 单头超强强力（Heavy Duty clamp with single bolt）

加紧范围 size mm	产品货号 Item No		螺丝 screw	带宽 "bandwidth mm"	料厚 thickness of band mm	建议安装扭力 suggested install torque
	W1	W4				
68-73	QL06A6873	QL06D6873	M10×70	30	1.7	30Nm
74-79	QL06A7479	QL06D7479	M10×70			
80-85	QL06A8085	QL06D8085	M10×70			
86-91	QL06A8691	QL06D8691	M10×70			
92-97	QL06A9297	QL06D9297	M10×70			
98-103	QL06A98103	QL06D98103	M10×70			
104-112	QL06A104112	QL06D104112	M10×70			
113-121	QL06A113121	QL06D113121	M10×70			
122-130	QL06A122130	QL06D122130	M10×90			
131-139	QL06A131139	QL06D131139	M10×90			
140-148	QL06A140148	QL06D140148	M10×90			
149-161	QL06A149161	QL06D149161	M10×90			
162-174	QL06A162174	QL06D162174	M10×90			
175-187	QL06A175187	QL06D175187	M10×90			
188-200	QL06A188200	QL06D188200	M10×90			
201-213	QL06A201213	QL06D201213	M10×100			
214-226	QL06A214226	QL06D214226	M10×100			
227-239	QL06A227239	QL06D227239	M10×100			
240-252	QL06A240252	QL06D240252	M10×100			
248-260	QL06A248260	QL06D248260	M10×100			

材质 material	钢带 Band	舌板 bridge	轴 Trunnion	垫片 washer	螺栓 bolt
W1	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	A2-70



■ QL06-2 双头超强强力（Heavy Duty clamp with double bolts）

加紧范围 size mm	货号 QL06A	螺丝 screw	带宽 "bandwidth mm"	料厚 thickness of band mm	建议安装扭力 suggested install torque
74-79	QL06-2A7479	M10×80	30	1.7	30Nm
80-85	QL06-2A8085	M10×80			
86-91	QL06-2A8691	M10×80			
92-97	QL06-2A9297	M10×80			
98-103	QL06-2A98103	M10×80			
97-107	QL06-2A97107	M10×80			
104-112	QL06-2A104112	M10×80			
113-121	QL06-2A113121	M10×80			
122-130	QL06-2A122130	M10×90			
131-139	QL06-2A131139	M10×90			
140-148	QL06-2A140148	M10×90			
149-161	QL06-2A149161	M10×90			
162-174	QL06-2A162174	M10×90			
175-187	QL06-2A175187	M10×90			
188-200	QL06-2A188200	M10×90			
200-220	QL06-2A201220	M10×90			
220-240	QL06-2A220240	M10×100			
240-260	QL06-2A240260	M10×100			
260-280	QL06-2A260280	M10×100			
280-300	QL06-2A280300	M10×100			
300-325	QL06-2A300325	M10×100			
325-350	QL06-2A325350	M10×100			
350-375	QL06-2A350375	M10×100			
375-400	QL06-2A375400	M10×100			
400-425	QL06-2A400425	M10×100			
425-450	QL06-2A425450	M10×100			
450-475	QL06-2A450475	M10×100			
475-500	QL06-2A475500	M10×100			

材质 material	钢带 Band	舌板 bridge	轴 Trunnion	垫片 washer	螺栓 bolt
W1	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel



■ QL05 双头超强强力（Double bolts and double bands super clamp）

加紧范围 Size mm	带宽 bandwidth mm	料厚 thickness of band mm	螺丝 screw	产品货号Item no.			建议安装扭力 suggested install torque	只/箱 pcs/carton
				W1	W4	W5		
35-45	20	1.0	M6*45	QL05A3545	QL05D3545	QL05E3545	9Nm	100
40-50				QL05A4050	QL05D4050	QL05E4050		100
45-55				QL05A4555	QL05D4555	QL05E4555		100
50-60				QL05A5060	QL05D5060	QL05E5060		100
55-65				QL05A5565	QL05D5565	QL05E5565		100
60-70				QL05A6070-1	QL05D6070-1	QL05E6070-1		100
65-75				QL05A6575-1	QL05D6575-1	QL05E6575-1		100
70-80				QL05A7080-1	QL05D7080-1	QL05E7080-1		100
75-85				QL05A7585-1	QL05D7585-1	QL05E7585-1		100
80-90				QL05A8090-1	QL05D8090-1	QL05E8090-1		100
85-95				QL05A8595-1	QL05D8595-1	QL05E8595-1		100
60-70		1.0	M8*60	QL05A6070-2	QL05D6070-2	QL05E6070-2	18Nm	50
70-80				QL05A7080-2	QL05D7080-2	QL05E7080-2		50
80-90				QL05A8090-2	QL05D8090-2	QL05E8090-2		50
90-100				QL05A90100	QL05D90100	QL05E90100		50
100-110				QL05A100110	QL05D100110	QL05E100110		50
110-120				QL05A110120	QL05D110120	QL05E110120		50
120-130				QL05A120130	QL05D120130	QL05E120130		50
130-140				QL05A130140	QL05D130140	QL05E130140		50
140-150				QL05A140150	QL05D140150	QL05E140150		50
150-160				QL05A150160	QL05D150160	QL05E150160		50
160-170				QL05A160170	QL05D160170	QL05E160170		50
170-180				QL05A170180	QL05D170180	QL05E170180		50
180-190				QL05A180190	QL05D180190	QL05E180190		25
190-200				QL05A190200	QL05D190200	QL05E190200		25
200-210				QL05A200210	QL05D200210	QL05E200210		25
210-220				QL05A210220	QL05D210220	QL05E210220		25
220-230				QL05A220230	QL05D220230	QL05E220230		25
230-240				QL05A230240	QL05D230240	QL05E230240		25
240-250				QL05A240250	QL05D240250	QL05E240250		25
250-260				QL05A250260	QL05D250260	QL05E250260		25
260-270				QL05A260270	QL05D260270	QL05E260270		25
270-280				QL05A270280	QL05D270280	QL05E270280		25
290-300				QL05A290300	QL05D290300	QL05E290300		25



材质 material	钢带 Band	舌板 bridge	轴 Trunnion	螺栓 bolt
W1	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss	A2-70
W5	AISI 316ss	AISI 316ss	AISI 316ss	A4-70

■ 沟槽 V-band super clamp



由于该产品尺寸要求较严格，如果询价，请提供详细尺寸或者样品；
Because of the special applicative field, if you ask the prices, please provide the detailed drawings or samples.

天津市洪彩喉箍制造有限公司

YX11 单耳可调卡箍（CV joint clamp）

规格	产品货号Item No		带宽	料厚	材质
size	W1	W2	bandwidth mm	thickness of band mm	material
25-40	---	YX11D2540	6.3	0.5	AISI 301ss/304ss
20-45	---	YX11D2045	6.3	0.5	AISI 301ss/304ss
45-120	---	YX11D45120	8	0.6	AISI 301ss/304ss
20-50	YX11A2050	---	7	0.6	zinc plated steel
50-120	YX11A50120	---	9	0.8	zinc plated steel



YX12 单耳无极卡箍（Single ear clamp）



带宽	料厚	规格	产品货号	材质 W4
bandwidth mm	thickness of band mm	size mm	Item No	material W4
5	0.5	6.0-7.0	YX127	AISI 304ss
5	0.5	7.0-8.7	YX1287	AISI 304ss
5	0.5	7.8-9.5	YX1295	AISI 304ss
5	0.5	8.8-10.5	YX12105	AISI 304ss
7	0.6	9.4-11.9	YX12119	AISI 304ss
7	0.6	9.8-12.3	YX12123	AISI 304ss
7	0.6	10.3-12.8	YX12128	AISI 304ss
7	0.6	10.8-13.3	YX12133	AISI 304ss
7	0.6	11.3-13.8	YX12138	AISI 304ss
7	0.6	11.5-14.0	YX12140	AISI 304ss
7	0.6	12.0-14.5	YX12145	AISI 304ss
7	0.6	12.3-14.8	YX12148	AISI 304ss
7	0.6	12.8-15.3	YX12153	AISI 304ss
7	0.6	13.2-15.7	YX12157	AISI 304ss
7	0.6	13.7-16.2	YX12162	AISI 304ss
7	0.6	14.1-16.6	YX12166	AISI 304ss
7	0.6	14.3-16.8	YX12168	AISI 304ss
7	0.6	14.5-17.0	YX12170	AISI 304ss
7	0.6	15.0-17.5	YX12175	AISI 304ss
7	0.6	14.5-17.8	YX12178	AISI 304ss
7	0.6	14.8-18.0	YX12180	AISI 304ss
7	0.6	15.3-18.5	YX12185	AISI 304ss
7	0.6	16.0-19.2	YX12192	AISI 304ss
7	0.6	16.6-19.8	YX12198	AISI 304ss
7	0.6	17.8-21.0	YX12210	AISI 304ss
7	0.6	19.4-22.6	YX12226	AISI 304ss
7	0.6	20.3-23.5	YX12235	AISI 304ss
7	0.6	20.9-24.1	YX12241	AISI 304ss
7	0.6	22.4-25.6	YX12256	AISI 304ss
7	0.6	23.9-27.1	YX12271	AISI 304ss
7	0.6	25.4-28.6	YX12286	AISI 304ss
7	0.6	26.9-30.1	YX12301	AISI 304ss
7	0.6	27.6-30.8	YX12308	AISI 304ss
7	0.6	28.4-31.6	YX12316	AISI 304ss
7	0.6	29.9-33.1	YX12331	AISI 304ss
7	0.6	31.4-34.5	YX12345	AISI 304ss
7	0.6	32.9-36.1	YX12361	AISI 304ss
7	0.6	34.4-37.6	YX12376	AISI 304ss
7	0.6	34.9-38.1	YX12381	AISI 304ss
7	0.6	36.4-39.6	YX12396	AISI 304ss
7	0.6	37.8-41.0	YX12410	AISI 304ss
7	0.6	39.3-42.5	YX12425	AISI 304ss
7	0.6	40.8-44.0	YX12440	AISI 304ss
7	0.6	42.3-45.5	YX12455	AISI 304ss
7	0.6	43.6-47.0	YX12470	AISI 304ss
7	0.6	45.3-48.5	YX12485	AISI 304ss
7	0.6	46.8-50.0	YX12500	AISI 304ss



MN01 迷你喉箍（Mini hose clamp）

加紧范围	带宽	产品货号 Item no.		只/箱
Size mm	bandwidth mm	W1	W4	pcs/carton
6-8	9	MN01A0608	MN01D0608	2000
7-9		MN01A0709	MN01D0709	2000
8-10		MN01A0810	MN01D0810	2000
9-11		MN01A0911	MN01D0911	2000
10-12		MN01A1012	MN01D1012	2000
11-13		MN01A1113	MN01D1113	2000
12-14		MN01A1214	MN01D1214	2000
13-15		MN01A1315	MN01D1315	2000
14-16		MN01A1416	MN01D1416	2000
15-17		MN01A1517	MN01D1517	2000
16-18		MN01A1618	MN01D1618	2000
17-19		MN01A1719	MN01D1719	2000
18-20		MN01A1820	MN01D1820	2000
19-21		MN01A1921	MN01D1921	2000
20-22		MN01A2022	MN01D2022	2000
21-23		MN01A2123	MN01D2123	2000
22-24		MN01A2224	MN01D2224	2000
23-25		MN01A2325	MN01D2325	2000
24-26		MN01A2426	MN01D2426	2000
25-27		MN01A2527	MN01D2527	2000
26-28		MN01A2628	MN01D2628	2000
27-29		MN01A2729	MN01D2729	1000
28-30		MN01A2830	MN01D2830	1000
29-31		MN01A2931	MN01D2931	1000
30-32		MN01A3032	MN01D3032	1000
31-33		MN01A3133	MN01D3133	1000
32-34		MN01A3234	MN01D3234	1000

材质 material	钢带 Band	螺丝 screw	螺母 nut
W1	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI 301ss/304ss	AISI 301ss/304ss	AISI 301ss/304ss

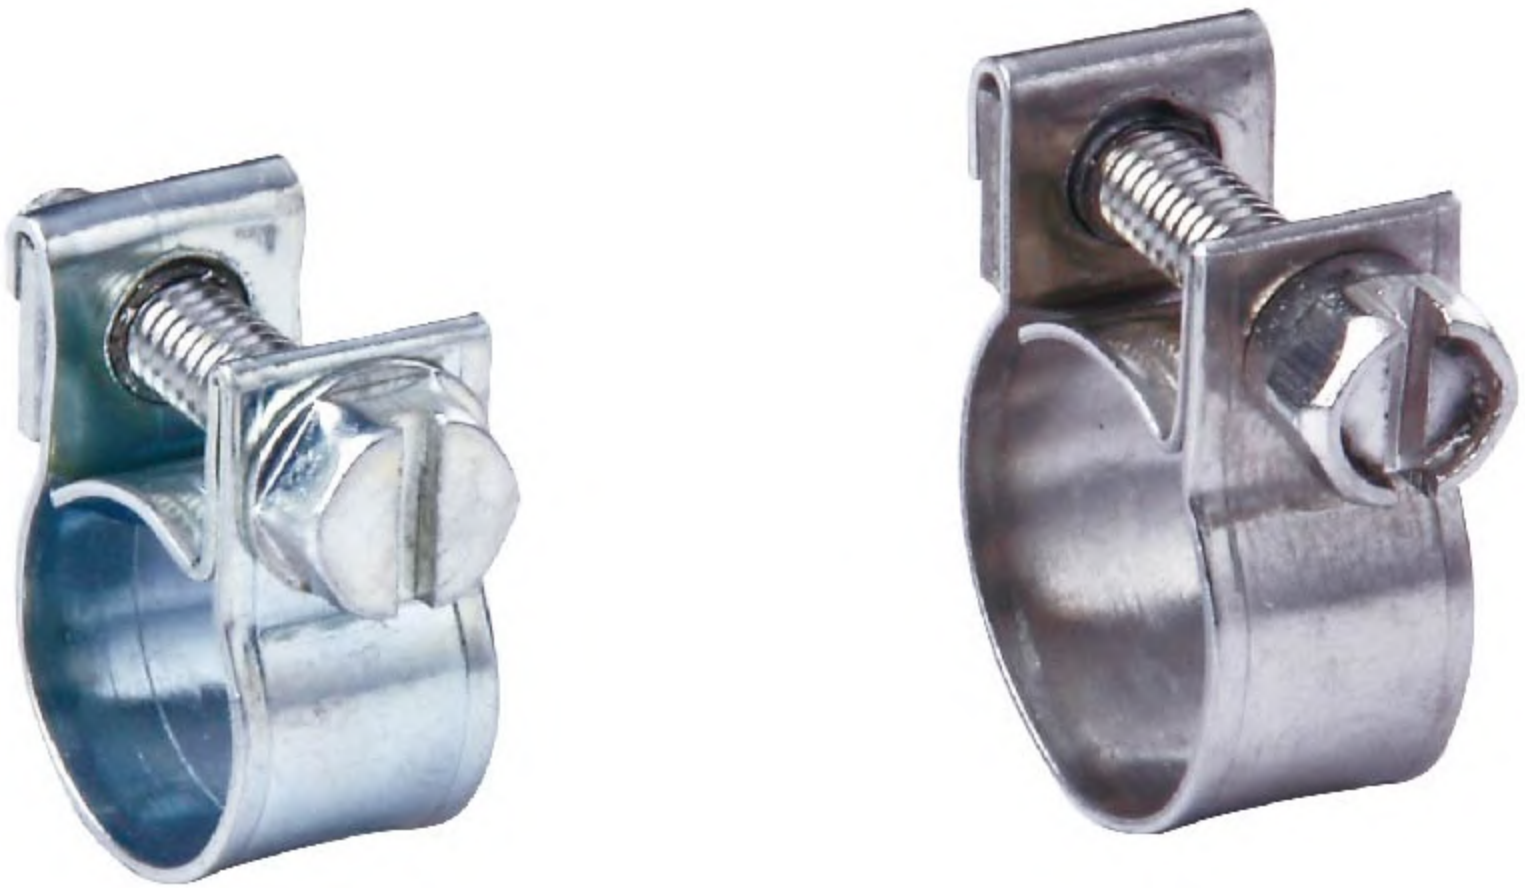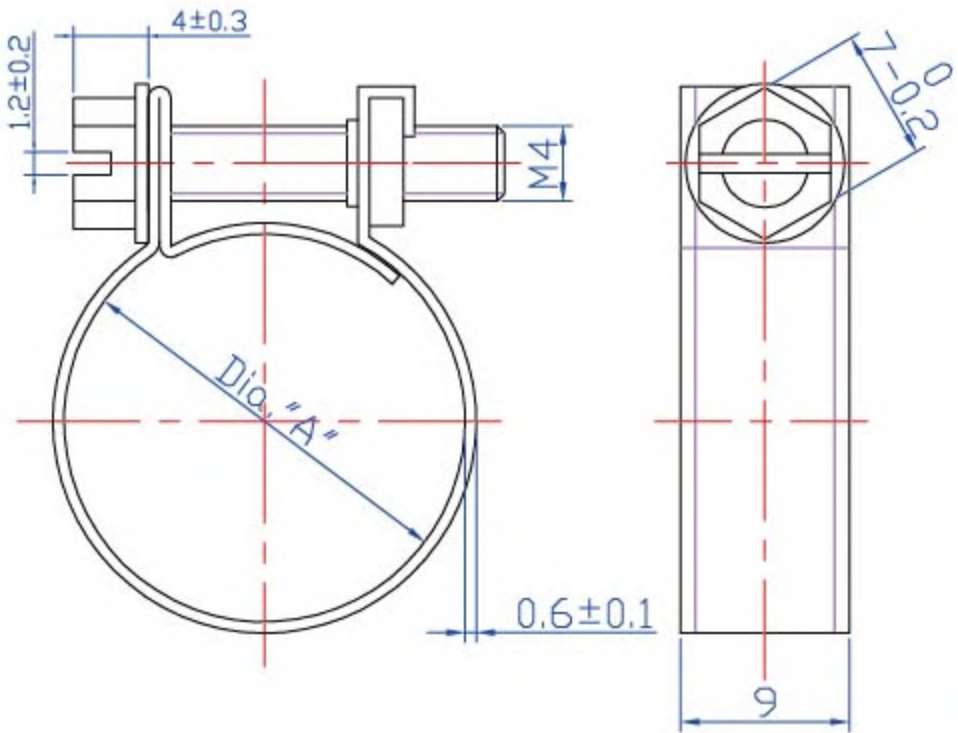


根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also availab
以上信息仅供参考，不作为技术规范
All the information is just for your reference can't be used as specification


天津市洪彩喉箍制造有限公司

■ LJT01普通连胶条卡箍
P-clip with rubber

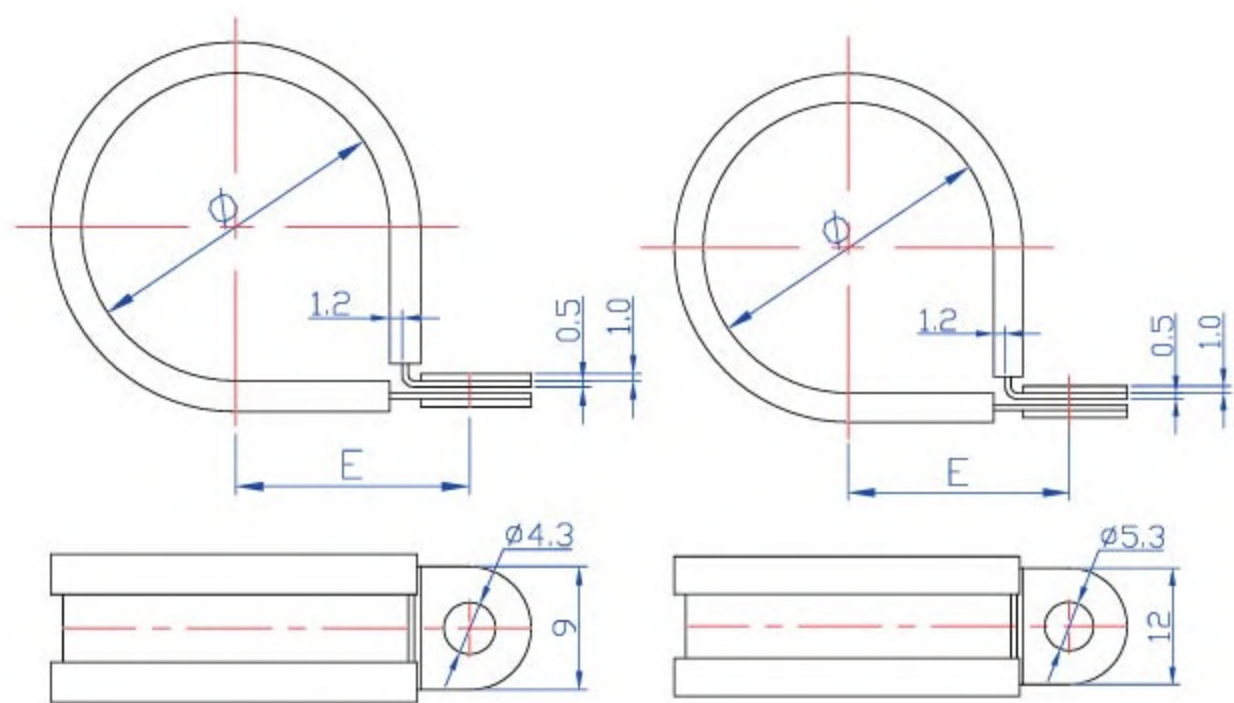


直径(φ)	E
4-36	$\phi/2+6.2$


直径(φ)	E
4-40	$\phi/2+7.7$

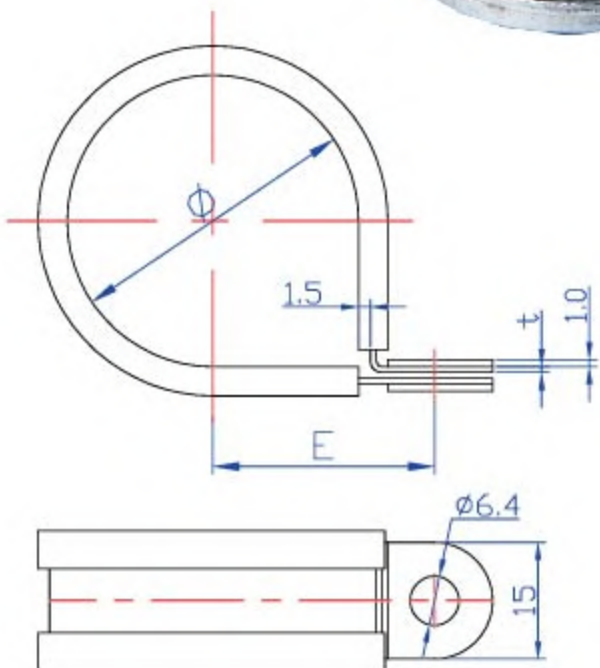

直径(φ)	t	E
3-14	0.6	$\phi/2+9+t$
15-110	0.8	

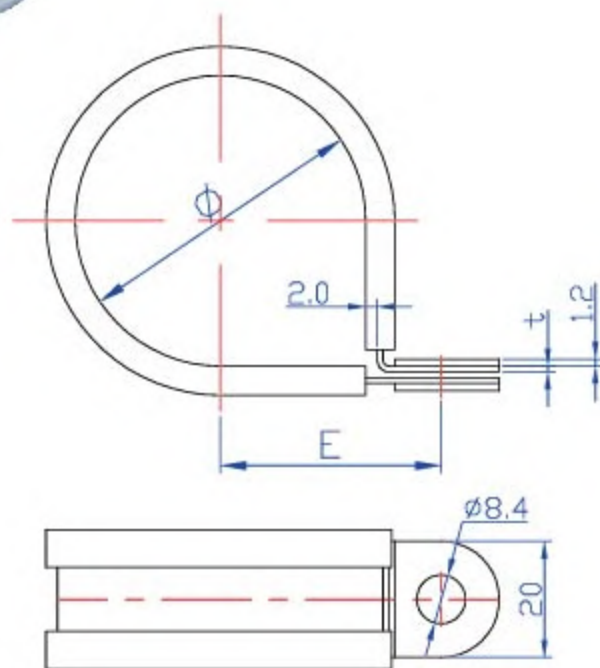

直径(φ)	t	E
10-24	0.8	$\phi/2+12+t$
25-74	1.0	

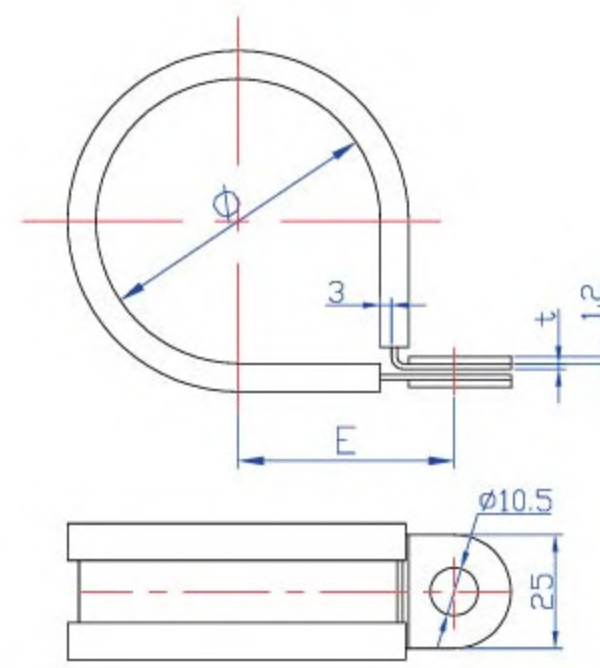

直径(φ)	t	E
12-49	1.0	$\phi/2+15.5+t$
50-100	1.2	

■ 其他样式连胶条
other types of P-clip




涂塑连胶条
P-clip with vinyl coated
LJT02

12.7mm连胶条
bandwidth 1/2"
LJT03

加紧范围	带宽	料厚	货号 YX08	只/箱	材料 W1
Size mm	bandwidth mm	thickness of band mm	Item no. YX08	pcs/carton	material W1
3--5	6	0.7	YX080305	2000	表面处理方式为镀锌或者达克罗涂覆 zinc plated steel or decromet coating steel
5--7	6	0.7	YX080507	2000	
7--9	7	0.7	YX080709	2000	
9--11	7	0.9	YX080911	2000	
11--13	7	1	YX081113	2000	
13--15	7.5	1	YX081315	2000	
14--17	7.5	1.2	YX081417	2000	
15--18	7.5	1.2	YX081518	2000	
17--20	7.5	1.2	YX081720	2000	
20--23	9	1.3	YX082023	1000	
21--25	9	1.3	YX082125	1000	
23--27	9	1.4	YX082327	1000	
25--28	9	1.4	YX082528	1000	
28--31	9.5	1.4	YX082831	1000	
31--34	9.5	1.4	YX083134	1000	
34--37	9.5	1.5	YX083437	1000	
37--40	10	1.6	YX083740	1000	
40--43	10	1.6	YX084043	1000	
43--46	10	1.6	YX084346	1000	

■ TH01弹簧卡箍

常规直径	最小直径dn max (交货直径)	最大直径dn min (打开直径)	S	L
φ13	φ12	φ14.2	0.8	40
φ14	φ13.3	φ15.8		
φ15	φ14	φ16.5		
φ16	φ14.9	φ17.5		
φ17	φ15.6	φ18.5		
φ18	φ16	φ19		
φ19	φ17.8	φ20.2	1.3	60
φ20	φ18.4	φ21.6		
φ21	φ19.4	φ22.5		
φ22	φ20.5	φ24.2		
φ23	φ21	φ24.7		
φ24	φ22	φ26		
φ25	φ23.5	φ26.8	1.7	60
φ26	φ24.3	φ28		
φ27	φ25.2	φ29		
φ28	φ26.1	φ30.2		
φ29	φ27	φ31.5		
φ30	φ28	φ32.5		
φ32	φ29.5	φ34.5		
φ34	φ30.6	φ36.4		
φ35	φ31.5	φ38		
φ36	φ32.5	φ39		
φ38	φ34.5	φ41.5		
φ40	φ35.5	φ42.5		

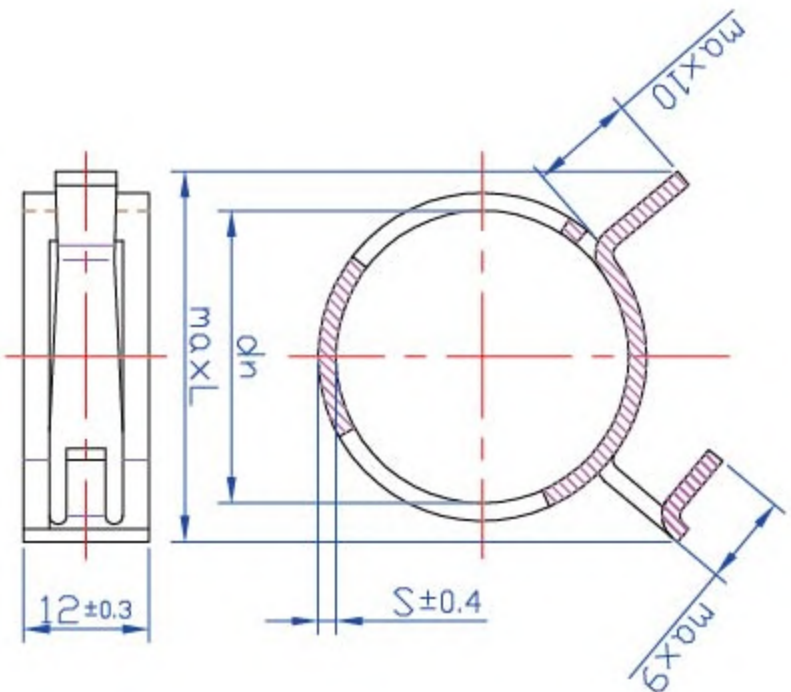

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference can't be used as specification

■ YX13 双钢丝卡箍（double wires hose clamp）

加紧范围 range mm	产品货号 Item No	W1		W4		螺钉尺寸 screw	只/袋 pes/bag	只/箱 pes/carton
		丝径mm wire dia	螺钉尺寸 screw	产品货号 Item No	丝径mm wire dia			
11-14	YX13A1114	1.5	M5x30	YX13D1114	2.0	M6x30	50	1000
13-16	YX13A1316	1.5	M5x30	YX13D1316	2.0	M6x30	50	1000
15-18	YX13A1518	1.5	M5x30	YX13D1518	2.0	M6x30	50	1000
17-20	YX13A1720	1.8	M5x30	YX13D1720	2.0	M6x30	50	1000
19-22	YX13A1922	1.8	M5x30	YX13D1922	2.0	M6x30	50	1000
20-24	YX13A2024	1.8	M5x30	YX13D2024	2.0	M6x30	50	1000
22-26	YX13A2226	1.8	M5x30	YX13D2226	2.0	M6x30	50	1000
24-28	YX13A2428	1.8	M5x30	YX13D2428	2.0	M6x35	50	1000
26-30	YX13A2630	2.2	M6x40	YX13D2630	2.0	M6x35	50	500
28-32	YX13A2832	2.2	M6x40	YX13D2832	2.0	M6x40	50	500
31-35	YX13A3135	2.2	M6x40	YX13D3135	2.0	M6x40	50	500
34-38	YX13A3438	2.2	M6x40	YX13D3438	2.0	M6x40	50	500
35-40	YX13A3540	2.2	M6x40	YX13D3540	2.0	M6x40	50	500
37-42	YX13A3742	2.2	M6x40	YX13D3742	2.0	M6x40	50	500
40-45	YX13A4045	2.2	M6x40	YX13D4045	2.0	M6x40	50	500
43-48	YX13A4348	2.2	M6x50	YX13D4348	2.0	M6x40	50	500
45-50	YX13A4550	2.2	M6x50	YX13D4550	2.3	M6x40	25	500
47-52	YX13A4752	2.2	M6x50	YX13D4752	2.3	M6x50	25	500
50-55	YX13A5055	2.2	M6x50	YX13D5055	2.3	M6x50	25	500
53-58	YX13A5358	2.2	M6x50	YX13D5358	2.3	M6x50	25	500
55-60	YX13A5560	2.2	M6x60	YX13D5560	2.3	M6x50	25	500
54-62	YX13A5462	2.2	M6x60	YX13D5462	2.3	M6x50	25	500
60-65	YX13A6065	2.5	M6x60	YX13D6065	2.3	M6x50	25	500
63-68	YX13A6368	2.5	M6x60	YX13D6368	2.3	M6x50	25	500
65-70	YX13A6570	2.5	M6x70	YX13D6570	2.3	M6x50	25	250
70-75	YX13A7075	2.5	M6x70	YX13D7075	2.3	M6x50	10	250
75-80	YX13A7580	2.5	M6x70	YX13D7580	2.3	M6x50	10	250
80-85	YX13A8085	2.5	M6x70	YX13D8085	2.3	M6x50	10	250
84-90	YX13A8490	2.5	M8x70	YX13D8490	2.3	M6x50	10	250
89-95	YX13A8995	2.5	M8x70	YX13D8995	2.3	M6x50	10	250
94-100	YX13A94100	2.5	M8x80	YX13D94100	2.3	M6x50	10	250
98-105	YX13A98105	2.5	M8x80	YX13D98105	2.3	M6x60	10	250
103-110	YX13A103110	2.5	M8x80	YX13D103110	2.3	M6x60	10	250
108-115	YX13A108115	2.5	M8x80	YX13D108115	2.3	M6x60	10	250
113-120	YX13A113120	2.5	M8x80	YX13D113120	2.3	M6x60	10	250

材质 material	钢丝 wire	螺丝 screw	垫片 washer	耳板 plate
W1	65Mn steel with zinc coating	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI 304ss	AISI 304ss	AISI 304ss	AISI 304ss



■ CD01 & CD06 抽带式卡箍（15mm & 19mm Throbbing clamp）

加紧范围 Size	产品货号Item no.			
	15mm带宽(bandwidth 15mm)		19mm带宽(bandwidth 19mm)	
mm	W1	W4	W1	W4
φ 32	CD01A32	CD01D32	——	——
φ 35	CD01A35	CD01D35	——	——
φ 38	CD01A38	CD01D38	——	——
φ 44	CD01A44	CD01D44	——	——
φ 51	CD01A51	CD01D51	CD06A51	CD06D51
φ 57	CD01A57	CD01D57	CD06A57	CD06D57
φ 64	CD01A64	CD01D64	CD06A64	CD06D64
φ 70	CD01A70	CD01D70	CD06A70	CD06D70
φ 76	CD01A76	CD01D76	CD06A76	CD06D76
φ 89	CD01A89	CD01D89	CD06A89	CD06D89
φ 102	CD01A102	CD01D102	CD06A102	CD06D102
φ 114	CD01A114	CD01D114	CD06A114	CD06D114
φ 127	CD01A127	CD01D127	CD06A127	CD06D127
φ 152	CD01A152	CD01D152	CD06A152	CD06D152
φ 178	CD01A178	CD01D178	CD06A178	CD06D178
φ 203	CD01A203	CD01D203	CD06A203	CD06D203

■ CD03 抽带式卡箍（9.7mm Throbbing clamp）

加紧范围 Size		带宽	产品货号Item no.	
inch	mm	bandwidth mm	W1	W4
13/16"	21	9.7	CD03A21	CD03D21
13/8"	35	9.7	CD03A35	CD03D35

■ CD05 抽带式卡箍（15.8mm Throbbing clamp）

加紧范围 Size		带宽	产品货号Item no.	
inch	mm	bandwidth mm	W1	W4
1"	25	15.8	CD05A25	CD05B25
1 1/4"	32	15.8	CD05A32	CD05B32
1 1/2"	38	15.8	CD05A38	CD05B38
1 3/4"	44	15.8	CD05A44	CD05B44
2"	51	15.8	CD05A51	CD05B51
2 1/4"	57	15.8	CD05A57	CD05B57
2 1/2"	64	15.8	CD05A64	CD05B64
2 3/4"	70	15.8	CD05A70	CD05B70
3"	76	15.8	CD05A76	CD05B76
3 1/2"	89	15.8	CD05A89	CD05B89
4"	102	15.8	CD05A102	CD05B102
4 1/2"	140	15.8	CD05A140	CD05B140
5"	127	15.8	CD05A127	CD05B127
6"	152	15.8	CD05A152	CD05B152
7"	178	15.8	CD05A178	CD05B178
8"	203	15.8	CD05A203	CD05B203



材质 material	钢带 Band	箍头 Housing
W1	zinc plated steel /galvanized steel	"zinc plated steel /galvanized steel"
W4	AISI 201ss/301ss/304ss	AISI 201ss/301ss/304ss

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also availab
以上信息仅供参考，不作为技术规范
All the information is just for your reference can't be used as specification

天津市洪彩喉箍制造有限公司

A型管束（箍带式卡箍）
Type A coupling

货号 W4	尺寸	每箱装量		外箱尺寸
item number	mm	inch	pcs/carton	carton size mm
GS01D40	DN40	1.5"	100	36*27.5*32
GS01D50	DN50	2"	100	41*32.5*31
GS01D75	DN75	3"	100	50*41*32
GS01D100	DN100	4"	100	63*51*33
GS01D125	DN125	5"	50	61-42*43
GS01D150	DN150	6"	50	73*53*44
GS01D200	DN200	8"	30	68*47*56
GS01D250	DN250	10"	25	60*60*53
GS01D300	DN300	12"	16	66*66*45



重型A型管束
Heavy duty A type coupling

货号 W4	尺寸	每箱装量		外箱尺寸
item number	mm	inch	pcs/carton	carton size mm
GS02D40	DN40	1.5"	100	39*31*34
GS02D50	DN50	2"	100	39*31*34
GS02D75	DN75	3"	100	50*41*34
GS02D100	DN100	4"	100	63*51*34
GS02D125	DN125	5"	50	60*42*54
GS02D150	DN150	6"	60	72*51*43
GS02D200	DN200	8"	30	68*48*55
GS02D250	DN250	10"	16	58*58*46
GS02D300	DN300	12"	16	67*67*59




B型管束（耳板式管束） Type B coupling

货号 W5	货号 W4	货号 W2	尺寸		每箱装量	外箱尺寸
item number	item number	item number	mm	inch	pcs/carton	carton size mm
GS03E40	GS03D40	GS03B40	DN40	1.5"	250	57*42*26
GS03E50	GS03D50	GS03B50	DN50	2"	100	42*32*24
GS03E75	GS03D75	GS03B75	DN75	3"	100	57*42*26
GS03E100	GS03D100	GS03B100	DN100	4"	100	70*52*28
GS03E125	GS03D125	GS03B125	DN125	5"	50	54*38*62
GS03E150	GS03D150	GS03B150	DN150	6"	50	54*38*62
GS03E200	GS03D200	GS03B200	DN200	8"	20	63*51*33




W管型不锈钢卡箍

公称直径DN	卡箍宽度 L	箍带厚度 t	波纹板厚度 t1	卡箍口径调节D		安装扭矩	
				最小	最大		
50	54	0.65	0.18	50	76	7.5N.m	
75				75	101		
100				101	127		
125	76			134	157		
150				160	182		
200	100			198	233		
250				248	298		
300	138			298	352		

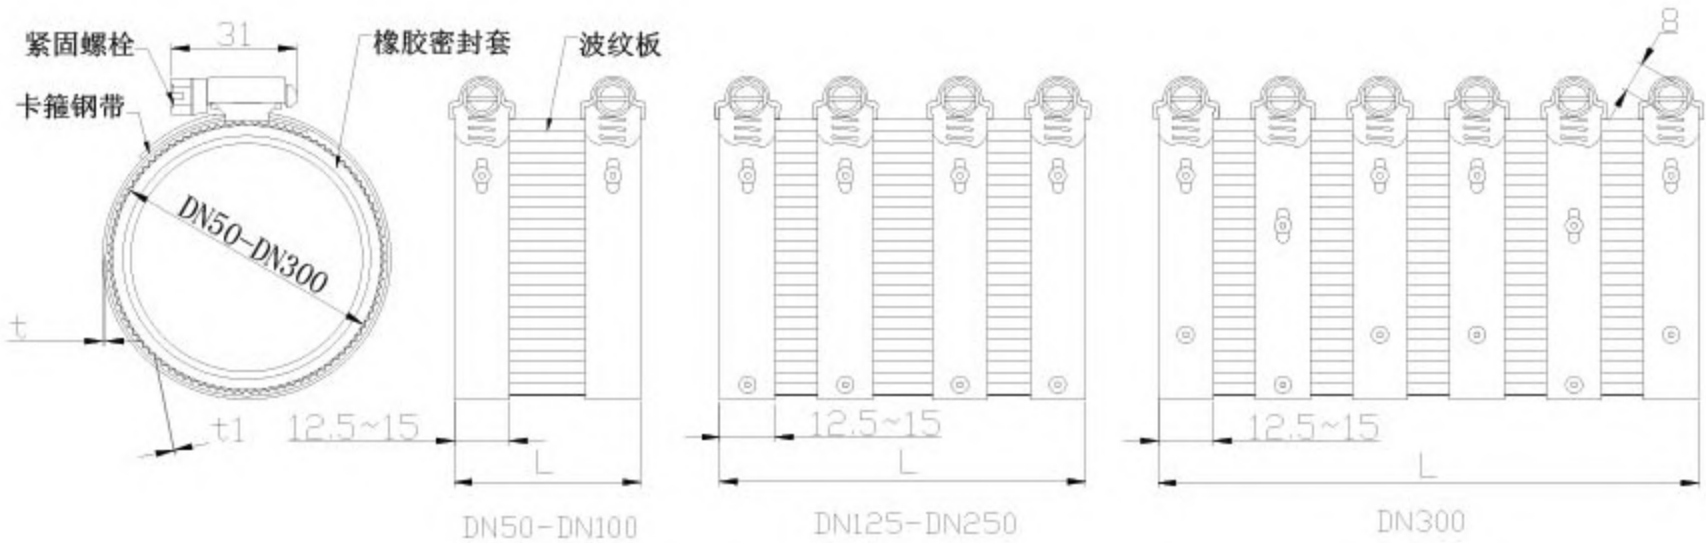

W1管型不锈钢卡箍

公称直径DN	D	卡箍钢带厚度t		螺母厚度 t1	耳板厚度 t2	卡箍宽度 L	螺栓	安装扭矩
		材质06Cr19Ni10	材质06Cr17Ni12Mo2					
50	70	0.4	0.5	4.8	1.8	41	M8-45	18N.m
75	94					45	M8-60	
100	124					54	M8-70	22N.m
125	154							
150	178					66	M10-80	30N.m
200	230	0.55	0.55	7.8	2.3			

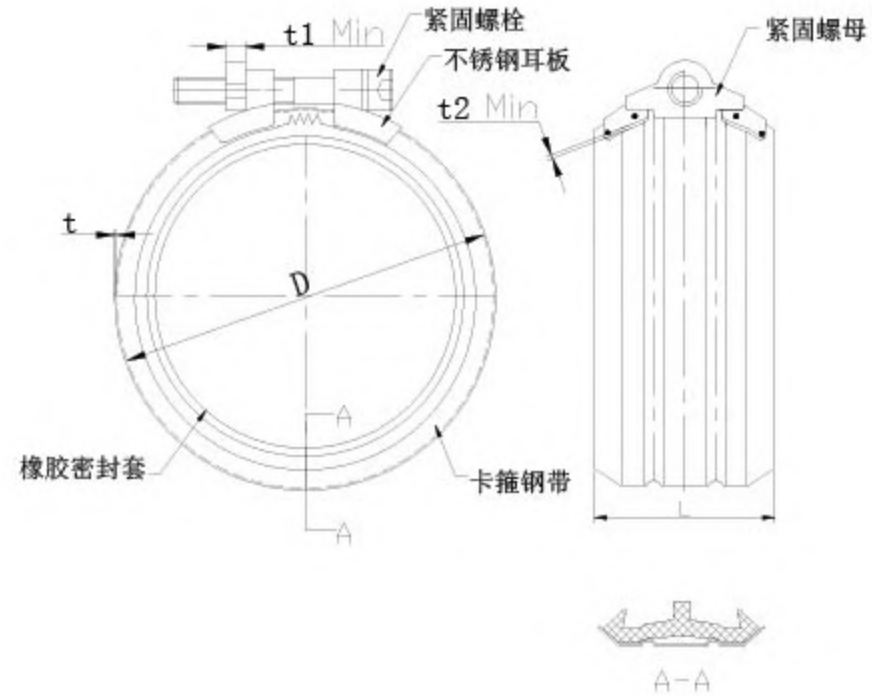

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范；
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference can't be used as specification